

VALVES & FITTINGS

for Hydrogen Refueling Station




Shut-off Valves
(High-Flow Type)



Flow Control Valves



Flow Control Valves
(High-Flow Type)

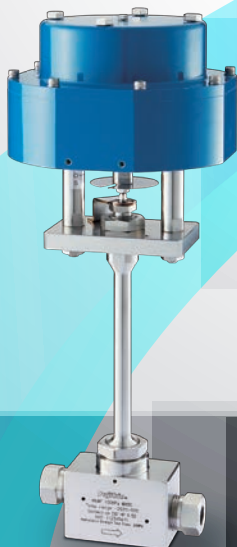

Ultra Low Temperature Valves
For Liquefied Hydrogen
(Shut-off Valves)



Manual Valves
(High-Flow Type)



UPG Fittings



Coned-and-Threaded
Connection



Check Valves

Filters

Fujikin creates a new “flow of things” in the hydrogen era with ultra-precision flow control.

Initiatives to use hydrogen as a power source and to generate electricity are gaining momentum around the world as society strives to realize carbon neutrality.

Against this backdrop, promoting global adoption of fuel cell vehicles (FCVs) and fuel cell-powered heavy-duty vehicles (HDVs) and building hydrogen refueling stations are urgent priorities, and valve devices that can withstand demanding environmental conditions such as super-low temperature and super-high pressure will play an essential role in realizing those goals.

Fujikin is developing products like the “Global Series, High-Flow Type” and “Global Series, Low-Temperature Valves for Use with Super-High-Pressure Liquid Hydrogen” for use as valves in hydrogen refueling stations, and we continue to strengthen a line of products that meet demanding requirements.

Going forward, we will continue to make improvements so that we can help realize the hydrogen-fueled society of the future.



Table of contents

■ Flow Control Valves / Shut-off Valves	P
100 MPa Flow Control Valves (Compact Type)	3
100 MPa Flow Control Valves (For Precool Low Temperature)	3
100 MPa Flow Control Valves (High-Flow Type)	4
100 MPa Shut-off Valves	5
100 MPa Shut-off Valves (For Precool Low Temperature)	5
100 MPa Shut-off Valves (High-Flow Type)	5
■ Accessories for Automatic Valves	
Regulators with Filter	6
Solenoid Valves	6
Proximity Switch, Controller	6
Explosion-Proof accessories For Positioners	6
■ Manual Valves / Check Valves / Filters	
100 MPa Manual Valves	7
100 MPa Check Valves	7
100 MPa Filters	7
100 MPa Manual Valves (High-Flow Type)	8
100 MPa Check Valves (High-Flow Type)	8
100 MPa Filters (High-Flow Type)	8
■ Ultra Low Temperature Valves For Liquefied Hydrogen	
Ultra Low Temperature Valves For Liquefied Hydrogen (Shut-off Valves)	9
Ultra Low Temperature Valves For Liquefied Hydrogen (Flow Control Valves)	10
Ultra Low Temperature Valves For Liquefied Hydrogen (Manual Valves)	10
Ultra Low Temperature Valves For Liquefied Hydrogen (Shut-off Valves) ,Low pressure type	11
Ultra Low Temperature Valves For Liquefied Hydrogen (Manual Valves) ,Low pressure type	11
■ Coned-and-Threaded Connection	
GUJU-H Type	12
GUJU-M Type	13
Piping Installation Guidelines	14
Adapters	16
■ Fusible-plug Type Pressure Relief Devices / Container Main Valves	
Fusible-plug Type Pressure Relief Devices (PRD)	17
Container Main Valves	17
■ UPG[®] Fittings	19
Piping Installation Guidelines	20
95 MPa UPG [®] Fittings	21
Flow Control Valves / Shut-off Valves with 95 MPa UPG [®] Fittings	22
Manual Valves / Check Valves / Filters with 95 MPa UPG [®] Fittings	23
50 MPa UPG [®] Fittings	24
Shut-off Valves with 50 MPa UPG [®] Fittings	25
Shut-off Valves with 45 MPa UPG [®] Fittings	25
Manual Valves / Check Valves / Filters with 50 MPa UPG [®] Fittings	26
Various Change Couplers for UPG [®]	27
■ Weld Fittings	
95 MPa Weld Fittings	28
50 MPa Weld Fittings	29
■ Model Number System	
Flow Control Valve Model Number	30
Shut-off Valve Model Number	31
Manual Valve / Check Valve / Filter Model Number	31
Coned-and-Threaded Connection Model Number, Collar-and-Gland Model Number	32
UPG [®] Fitting Part Number	32
■ PROVIDER POWER UNIT	33
■ Engineering services, equipment / piping design and production	34
■ Integrated Solutions	36
■ Cv Value Calculation	37
■ Cv Value Setting Standard for Flow Control Valves	38

Click here for catalog (PDF).



Flow Control Valves / Shut-off Valves

100 MPa Flow Control Valves (Compact Type)

Global Series



Features

1. Flow coefficient (Cv value) can be selected by replaced stem and seat.
2. Smart positioner with communications function can be available.
3. CE Ex II 2G Exc IIC T6

Specifications


Design Pressure	100 MPa
Fluid temperature range	-40 to +85 °C
Note: When using in a pre-cool line, please select the valve for precool low temperature type	
Ambient temperature range	-40 to +60 °C
Body materials	ASTM A479 316/316L (Dual spec.)

Dimensions, Ordering No.

Nominal size	Gland Thread (valves body side)	Collar Thread (tube side)	HEX.C	H1	H2	H3	H4	H5	Cv value MAX.	Ordering No
D	A	B								
6.35	7/16-20UNF	(Left) 1/4-28UNF	12.7	252	32	50	32	163	0.15	E34GM3R4-7100-4M- \star -WN
9.52	9/16-18UNF	(Left) 3/8-24UNF	15.8	252	32	50	32	163	0.25	E34GM3R4-7100-6M- \star -WN
14.2	13/16-16UN	(Left) 9/16-18UNF	19	252	32	50	32	163	0.25	E34GM3R4-7100-9M- \star -WN
14.2	13/16-16UN	(Left) 9/16-18UNF	19	254	33	51	33	164	0.5 [Middle flow type]	E34GM3R4-7100-9M- \star -MF


Coned & Threaded Connection MP type

\star indicates the Cv value number
(Refer to "Combination of Cv Value and Rangeability" on page 30.)

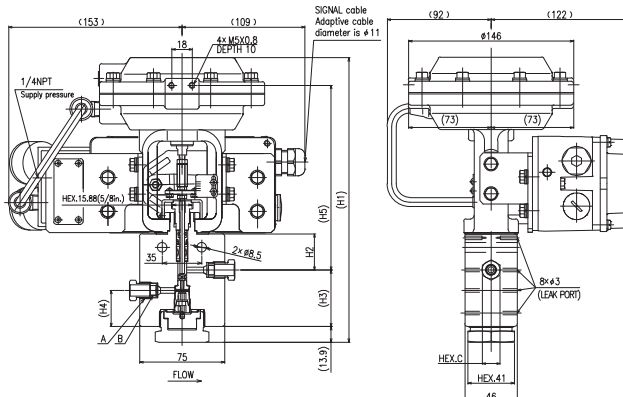

100 MPa Flow Control Valves (For Precool Low Temperature)

Global Series



Features

1. Flow coefficient (Cv value) can be selected by replaced stem and seat.
2. Smart positioner with communications function can be available.
3. CE Ex II 2G Exc IIC T6
4. Improved durability against heat cycles on the pre-cool line.

Specifications


Design Pressure	100 MPa
Fluid temperature range	-40 to +85 °C
Ambient temperature range	-40 to +60 °C
Body materials	ASTM A479 316/316L (Dual spec.)

Dimensions, Ordering No.

Nominal size	Gland Thread (valves body side)	Collar Thread (tube side)	HEX.C	H1	H2	H3	H4	H5	Cv value MAX.	Ordering No
D	A	B								
6.35	7/16-20UNF	(Left) 1/4-28UNF	12.7	342	32	50	56	254	0.15	E34GM3R4-7100M-4M- \star -WN
9.52	9/16-18UNF	(Left) 3/8-24UNF	15.8	342	32	50	56	254	0.25	E34GM3R4-7100M-6M- \star -WN
14.2	13/16-16UN	(Left) 9/16-18UNF	19	342	32	50	56	254	0.25	E34GM3R4-7100M-9M- \star -WN
14.2	13/16-16UN	(Left) 9/16-18UNF	19	344	33	51	57	255	0.5 [Middle flow type]	E34GM3R4-7100M-9M- \star -MF

Coned & Threaded Connection MP type



\star indicates the Cv value number
(Refer to "Combination of Cv Value and Rangeability" on page 30.)

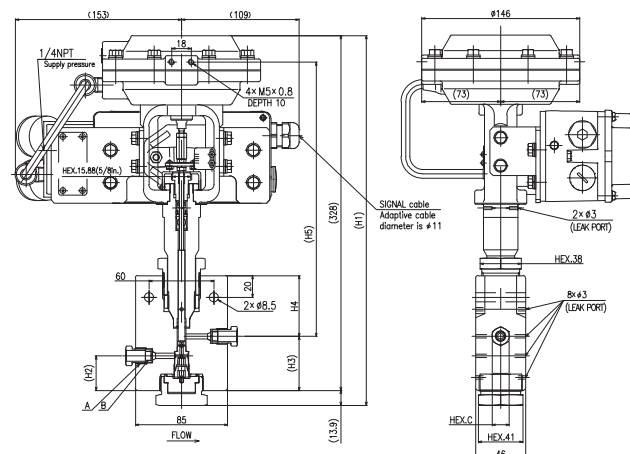

1. All wetted parts of Valves, Unions and Fittings in this catalog should be with non-corrosive gases only.
2. Please use each valve after confirming the instruction manual and daily inspection manual.

100 MPa Flow Control Valves (High-Flow Type)

Global Series

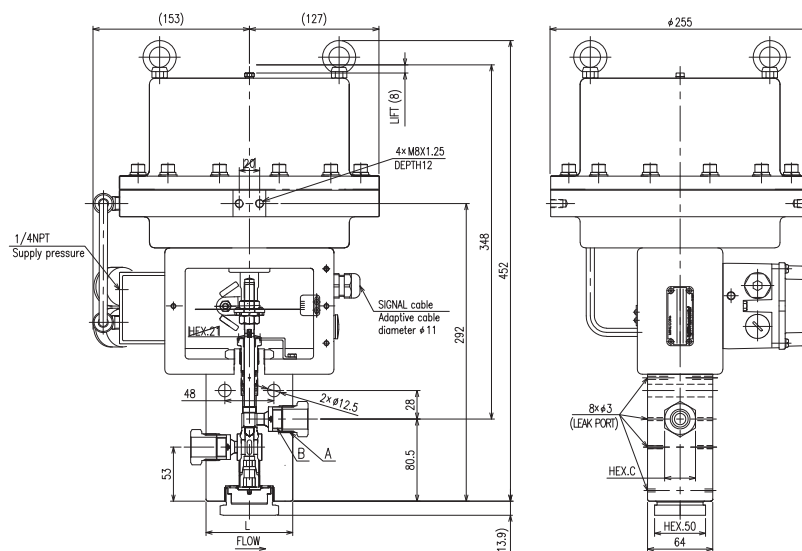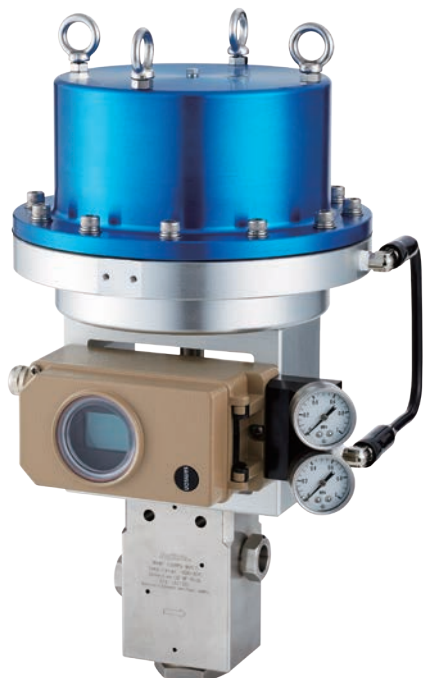

Features

1. Flow coefficient (Cv value) can be selected by replaced stem and seat.
2. High Flow series with Cv value of 2
3. Smart positioner with communications function can be available
4. CE II 2G Exc IIC T6

Specifications

Design Pressure	100 MPa
Fluid temperature range	-40 to +85 °C
Ambient temperature range	-40 to +60 °C
Body materials	ASTM A479 316/316L (Dual spec.)

Dimensions, Ordering No.

Nominal size	Gland Thread (valves body side)	Collar Thread (tube side)	HEX.C	L	Cv value MAX.	Ordering No
D	A	B				
19.05	3/4-14NPSM	(Left) 3/4-16UNF	30.2	85	2	E34GM4R6-7100-12M-*
25.4	1-3/8-12UNF	(Left) 3/4-16UNF	34.9	105	2	E34GM4R6-7100-16M-*


Coned & Threaded Connection MP type

*: indicates the Cv value number
(Refer to "Combination of Cv Value and Rangeability" on page 30.)



1. All wetted parts of Valves, Unions and Fittings in this catalog should be with non-corrosive gases only.
2. Please use each valve after confirming the instruction manual and daily inspection manual.

100 MPa Shut-off Valves

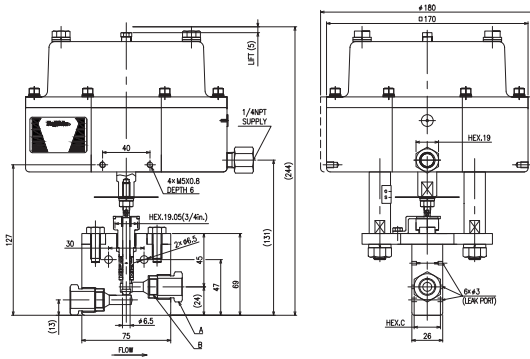

Features

- CE II 2G Exc IIC T6

Specifications

Design Pressure	100 MPa
Fluid temperature range	-40 to +85 °C
Ambient temperature range	-40 to +60 °C
Body materials	ASTM A479 316/316L(Dual spec.)

Note: When using in a pre-cool line, please contact Fujikin when ordering.


Dimensions, Ordering No.

Nominal size	Gland Thread (valves body side)	Collar Thread (tube side)	HEX.C	Cv value MAX.	Ordering No
D	A	B			
6.35	7/16-20UNF	(Left) 1/4-28UNF	12.7	0.25	APR-GUH-7100-4M
9.52	9/16-18UNF	(Left) 3/8-24UNF	15.8	0.7	APR-GUH-7100-6M
14.2	1 3/16-16UN	(Left) 9/16-18UNF	22.2	1	APR-GUH-7100-9M-S

Coned & Threaded Connection MP type

Global Series

100 MPa Shut-off Valves (For Precool Low Temperature)

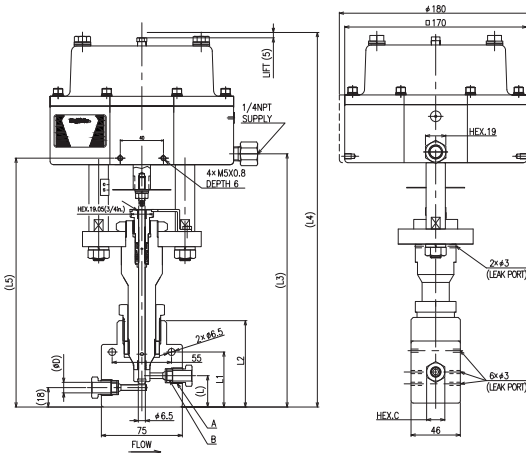

Features

- Improved durability against heat cycles on the pre-cool line.
- CE II 2G Exc IIC T6

Specifications

Design Pressure	100 MPa
Fluid temperature range	-40 to +85 °C
Ambient temperature range	-40 to +60 °C
Body materials	ASTM A479 316/316L(Dual spec.)


Dimensions, Ordering No.

Nominal size	Gland Thread (valves body side)	Collar Thread (tube side)	L	L1	L2	L3	L4	L5	HEX.C	Cv value MAX.	Ordering No
D	A	B									
6.35	7/16-20UNF	(Left) 1/4-28UNF	29	51	80	235	347	231	12.7	0.25	APR-GUH-7100M-4M
9.52	9/16-18UNF	(Left) 3/8-24UNF	29	51	80	235	347	231	15.8	0.7	APR-GUH-7100M-6M
14.2	1 3/16-16UN	(Left) 9/16-18UNF	31	53	82	237	349	233	22.2	1	APR-GUH-7100M-9M-S

Coned & Threaded Connection MP type

Global Series

100 MPa Shut-off Valves (High-Flow Type)

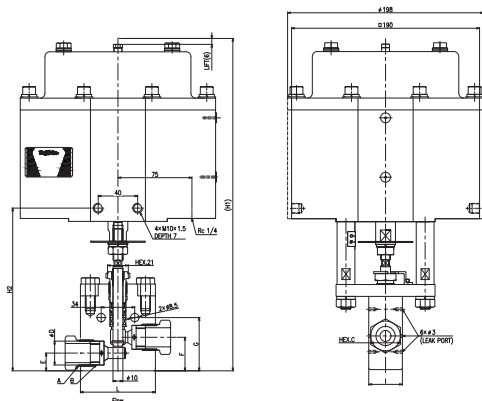

Features

- High flow series with Cv value of 2 or higher
- No differential pressure restriction conditions for use
- CE II 2G Exc IIC T6

Specifications

Design pressure	100 MPa
Fluid temperature range	-40 to +85 °C
Ambient temperature range	-40 to +60 °C
Body materials	ASTM A479 316/316L(Dual spec.)

Dimensions, Ordering No.

Normal size	Gland Thread (valves body side)	Collar Thread (tube side)	HEX.C	L	H1	H2	E	F	G	I	Cv Value MAX.	Ordering No
D	A	B										
19.05	3/4-14NPS	(Left) 3/4-16UNF	30.2	76	339	167	18	34	54	35	2.5	APR-GUH-7100-12M
25.4	1 3/8-12UNF	(Left) 1 1/4-11UNS	34.9	100	347	175	24	42.5	74	45	2.5	APR-GUH-7100-16M

Coned & Threaded Connection MP type

Global Series



- All wetted parts of Valves, Unions and Fittings in this catalog should be with non-corrosive gases only.
- Please use each valve after confirming the instruction manual and daily inspection manual.

Accessories for Automatic Valves

Regulators with Filter



SSS Co., Ltd.

Features

Regulating required air supply pressure for Flow Control Valves.

Makers		SSS Co., Ltd.
Model No.		XR-108
Specifications	Air Connecting Port	Rc1/4 (Pressure gauge: Rc1/8)
	Filter Element	Polypropylene bonded material Element: 5 μm
	Max Supply Pressure	0.9 MPa
	Weight	0.26 Kg

Solenoid Valves



KANEKO SANGYO CO., LTD



ASCO JAPAN Co., Ltd

Explosion Proof Construction	Item Numbers	Types	Makers	Features
ExdIICT6	MOOU-8-E22POA-SA	—	KANEKO SANGYO CO., LTD	<ul style="list-style-type: none"> Pressure-resistant & Explosion Proof Type Outdoor Prevention Drop IP67 Changeable by manual operation Various Explosion Proof Standard
Ex e mb IIC	WBLPG551A005MS	Direct Mount Type 3-Way	ASCO JAPAN Co., Ltd	<ul style="list-style-type: none"> Safety & Resin Filling Explosion Proof Type Hydrogen Explosion Proof Type Ex e mb IIC, Outdoor Prevention Drop IP67 Applicable to Manifold Type
	WBLPG551A017MS	Direct Mount Type 4-Way		
	WBLPG551A001MS	NAMUR Type 3,4-Way		
Ex ia IIC T4	CFSCISG551C505MO	Direct Mount Type 3-Way	ASCO JAPAN Co., Ltd	<ul style="list-style-type: none"> Intrinsically Safe Explosion Proof Type Hydrogen Explosion Proof Type Ex ia IIC T4, Outdoor Prevention Drop IP67 Certain operation by spring return Type
	CFSCISG551C517MO	Direct Mount Type 4-Way		
	CFSCISG551C501MO	NAMUR Type 3,4-Way		

★: When ordering, please specify explosion-proof construction and power supply specification.

Proximity Switch, Controller

Proximity switch



Controller


IDEC Corporation

Features

1. Output electrical signals indicating open or close status of valves.
2. Uses a two-wire DC system to allow for long-distance wiring highly resistant to noise.

Item	Model No.	Explosion-proof Construction
Proximity switch	Bi2-G12-Y1	ExiaIICT6
Controller	IM1-12EX-R	[Exia]IIC

Explosion-Proof accessories For Positioners



P & F


★: Please request necessary.

Intrinsically Safe Explosion proof Barrier for E32M3 Series

Makers	Model No.	Explosion-proof Construction
P & F	KFD2-SCD-Ex1. LK	Exia IIC

Manual Valves / Check Valves / Filters

100 MPa Manual Valves

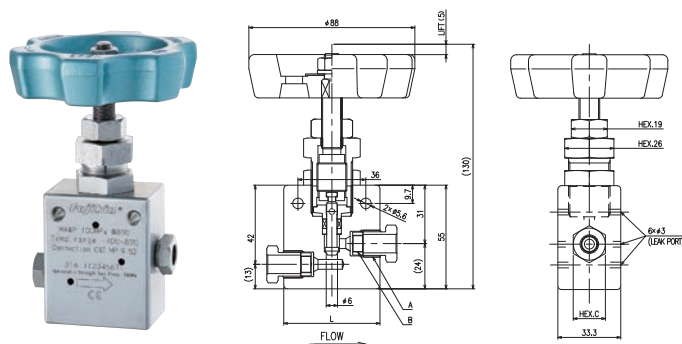

Features

1. Compact and with Durable Manual Valves
2. With Lock Nut

Global Series

Specifications


Design Pressure	100 MPa
Fluid temperature range	-40 to +85 °C
Ambient temperature range	-40 to +60 °C
Body materials	ASTM A479 316/316L (Dual spec.)

Dimensions, Ordering No.

Nominal size	Gland Thread (Valves body side)	Collar Thread (tube side)	HEX.C	L	Cv value	Ordering No.
D	A	B				
6.35	7/16-20UNF	(Left) 1/4-28UNF	12.7	51	0.18	GUH-7100L-4M
9.52	9/16-18UNF	(Left) 3/8-24UNF	15.8	51	0.55	GUH-7100L-6M
14.2	1 3/16-16UN	(Left) 9/16-18UNF	22.2	63.5	1	GUH-7100L-9M-S

Coned & Threaded Connection MP type

100 MPa Check Valves

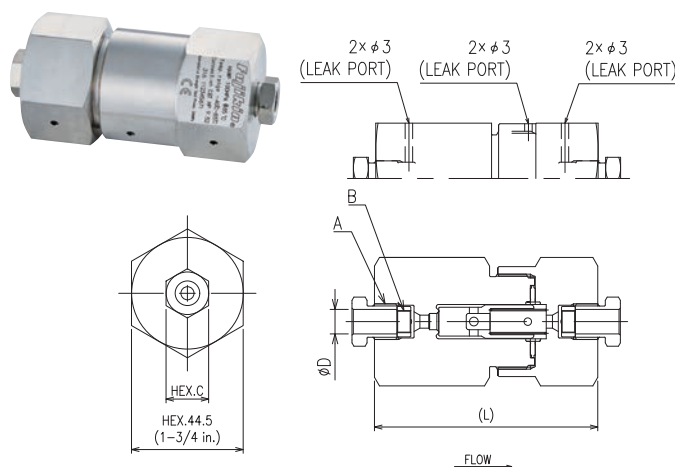

Features

1. Compact, in-line type
2. Little pressure drop due to optimal flow pass

Global Series

Specifications


Design Pressure		100 MPa
Fluid temperature range		-40 to +85 °C
Ambient temperature range		-40 to +85 °C
Body materials		ASTM A479 316/316L (Dual spec.)
Cracking pressure		Under 0.0069 MPa
Operating conditions	Flow rate	Over 40 m³/h normal
	Differential pressure (Reverse Pressure)	Over 10 MPa

Dimensions, Ordering No.

Nominal size	Gland Thread (Valves body side)	Collar Thread (tube side)	HEX.C	L	Cv value	Ordering No.
D	A	B				
6.35	7/16-20UNF	(Left) 1/4-28UNF	12.7	89	0.21	GUCL-7100-4M
9.52	9/16-18UNF	(Left) 3/8-24UNF	15.8	89	0.66	GUCL-7100-6M
14.2	1 3/16-16UN	(Left) 9/16-18UNF	22.2	100	1	GUCL-7100L-9M-S

Coned & Threaded Connection MP type

100 MPa Filters

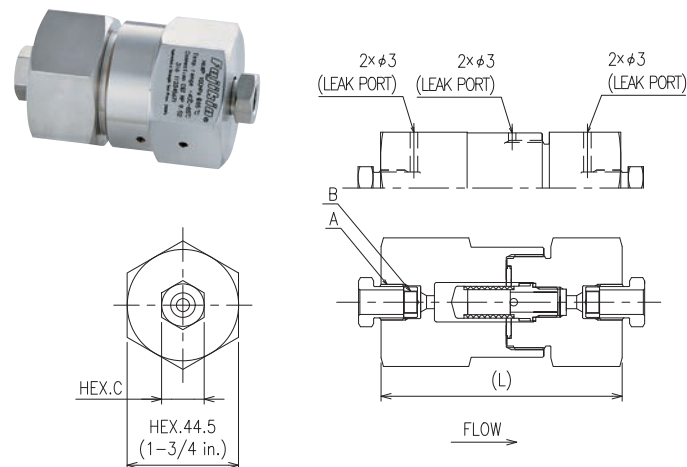

Features

1. Compact, in-line type
2. Little pressure drop due to optimal flow pass
3. Element size from 2, 5, and 10μm

Global Series

Specifications

Design Pressure	100 MPa
Fluid temperature range	-40 to +85 °C
Ambient temperature range	-40 to +85 °C
Body materials	ASTM A479 316/316L (Dual spec.)

Dimensions, Ordering No.

Nominal size	Gland Thread (Valves body side)	Collar Thread (tube side)	HEX.C	L	Ordering No.
D	A	B			
6.35	7/16-20UNF	(Left) 1/4-28UNF	12.7	96	GUFL-7100-4M+1
9.52	9/16-18UNF	(Left) 3/8-24UNF	15.8	96	GUFL-7100-6M+1
14.2	1 3/16-16UN	(Left) 9/16-18UNF	22.2	107	GUFL-7100-9M+1


Coned & Threaded Connection MP type *1: Element size number is added. (Refer to ⑥ in "Manual Valve/Check Valve/Filter Part Number" on page 31.)



1. All wetted parts of Valves, Unions and Fittings in this catalog should be with non-corrosive gases only.
2. Please use each valve after confirming the instruction manual and daily inspection manual.

100 MPa Manual Valves (High-Flow Type)

Global Series

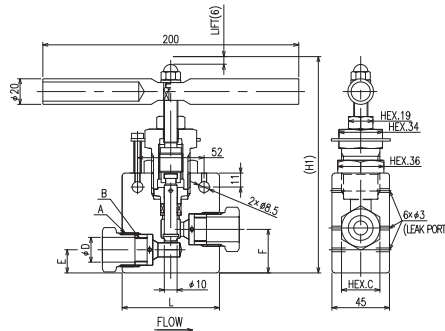

Features

1. High flow series with Cv value of 2 or higher
2. Equipped with a lock nut to fix the open/closed position of the valve

Specifications

Design Pressure	100 MPa
Fluid temperature range	-40 to +85 °C
Ambient temperature range	-40 to +60 °C
Body materials	ASTM A479 316/316L(Dual spec.)


Dimensions, Ordering No.

Normal size	Gland Thread (valves body side)	Collar Thread (tube side)	HEX.C	L	H1	E	F	Cv Value	Ordering No.
D	A	B							
19.05	3/4-14NPS	(Left)3/4-16UNF	30.2	76	169	18	34	2.5	GHU-7100L-12M
25.4	1-3/8-12UNF	(Left)1-14UNS	34.9	100	177	24	42.5	2.5	GHU-7100L-16M

Coned & Threaded Connection MP type

100 MPa Check Valves (High-Flow Type)

Global Series

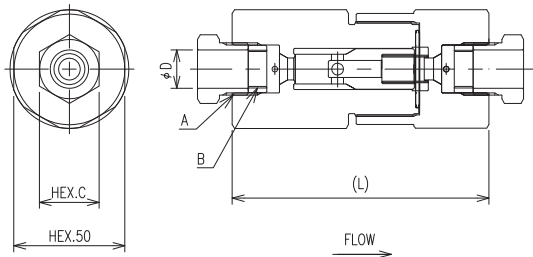

Features

1. High flow series with Cv value of 2 or higher
2. In-line shape, compact
3. Simple flow path shape and low pressure loss

Specifications

Design pressure	100 MPa
Fluid temperature range	-40 to +85 °C
Ambient temperature range	-40 to +85 °C
Body materials	ASTM A479 316/316L(Dual spec.)
Cracking pressure	Under 0.0069 MPa
Operating conditions	Flow rate Over 40 m³/h normal Different pressure (Reverse Pressure) Over 10 MPa


Dimensions, Ordering No.

Normal size	Gland Thread (valves body side)	Collar Thread (tube side)	HEX.C	L	Cv value	Ordering No.
D	A	B				
19.05	3/4-14NPS	(Left)3/4-16UNF	30.2	130	2	GUCL-7100-12M
25.4	1-3/8-12UNF	(Left)1-14UNS	34.9	163	2	GUCL-7100-16M

Coned & Threaded Connection MP type

100 MPa Filters (High-Flow Type)

Global Series

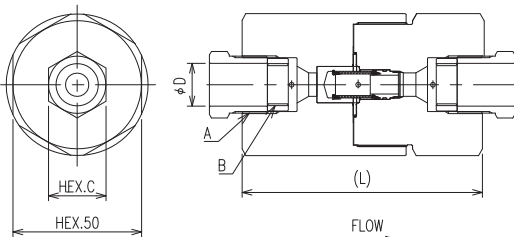

Features

1. In-line shape, compact
2. Simple flow path shape and low pressure loss
3. Element size from 2, 5, and 10 µm

Specifications

Design Pressure	100 MPa
Fluid temperature range	-40 to +85 °C
Ambient temperature range	-40 to +85 °C
Body materials	ASTM A479 316/316L(Dual spec.)

Dimensions, Ordering No.

Normal size	Gland Thread (valves body side)	Collar Thread (tube side)	HEX.C	L	Ordering No.
D	A	B			
19.05	3/4-14NPS	(Left)3/4-16UNF	30.2	116	GUFL-7100-12M-#1
25.4	1-3/8-12UNF	(Left)1-14UNS	34.9	145	GUFL-7100-16M-#1

Coned & Threaded Connection MP type

*1: Element size number is added.
(Refer to ⑥ in "Manual Valve/Check Valve/Filter Part Number" on page 31.)




1. All wetted parts of Valves, Unions and Fittings in this catalog should be with non-corrosive gases only.
2. Please use each valve after confirming the instruction manual and daily inspection manual.

Ultra Low Temperature Valves For Liquefied Hydrogen (Shut-off Valves)

Monodzukuri, Nippon Conference/Nikkan Kogyo Shimbun, LTD.



Cho Monodzukuri Grand Award for Parts Grand Award

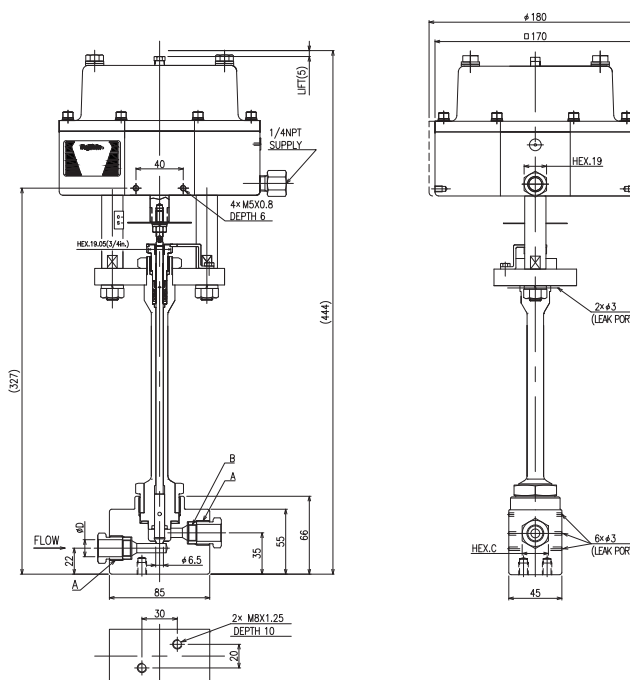


Coned & Threaded Connection MP type



1. All wetted parts of Valves, Unions and Fittings in this catalog should be with non-corrosive gases only.
2. Please use each valve after confirming the instruction manual and daily inspection manual.

Ultra Low Temperature Valves For Liquefied Hydrogen (Flow Control Valves)

Global Series

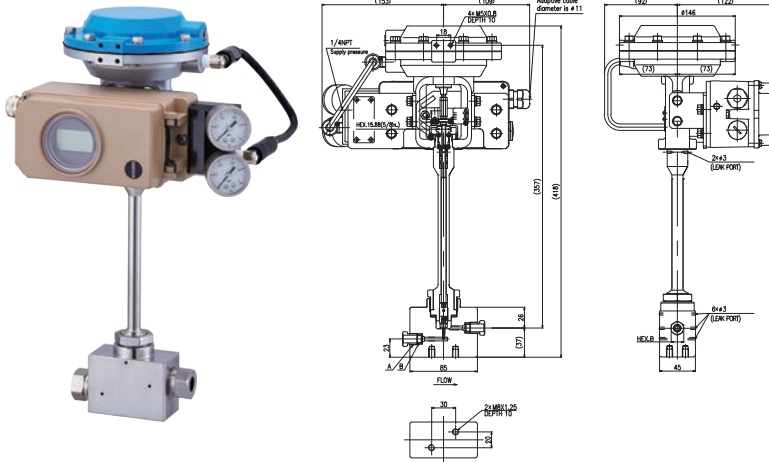

Check Valves for low temperature are also available.

Features

1. Capable of controlling ultra high-pressure liquefied hydrogen (Control range: ultra high-pressure of up to 100 MPa, ultra low temperature of down to -253°C)
2. Flow coefficient(Cv value) selectable from the wide range of options
3. Smart positioner with communications function can be available.

Specifications

Design Pressure	100 MPa
Fluid temperature range	-253 to +50 °C
Ambient temperature range	-40 to +50 °C
Body materials	SUH660

Dimensions, Ordering No.


Nominal Size	Gland Thread (valve body side)	Collar Thread (tube side)	HEX.C	Cv Value MAX.	Ordering No.
D	A	B			
6.35	7/16-20UNF	(Left) 1/4-28UNF	12.7	0.15	E34GM3R4-7100C-4M-*
9.52	9/16-18UNF	(Left) 3/8-24UNF	15.8	0.25	E34GM3R4-7100C-6M-*
14.2	13/16-16UN	(Left) 9/16-18UNF	19	0.25	E34GM3R4-7100C-9M-*

Coned & Threaded Connection MP type

*: indicates the Cv value number (Refer to "Combination of Cv Value and Rangeability" on page 30.)

Ultra Low Temperature Valves For Liquefied Hydrogen (Manual Valves)

Global Series

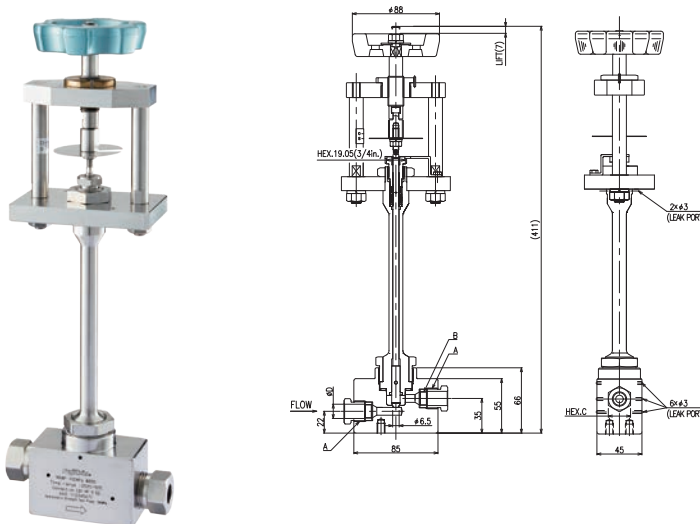

Features

1. Capable of controlling ultra high-pressure liquefied hydrogen (Control range: ultra high-pressure of up to 100 MPa, ultra low temperature of down to -253°C)
2. High-Flowrate (Cv value of 1.0)

Specifications

Design Pressure	100 MPa
Fluid temperature range	-253 to +50 °C
Ambient temperature range	-40 to +50 °C
Body materials	SUH660

Dimensions, Ordering No.


Normal size	Gland Thread (valves body side)	Collar Thread (tube side)	HEX.C	Cv Value MAX.	Ordering No.
D	A	B			
6.35	7/16-20UNF	(Left) 1/4-28UNF	12.7	0.25	GKLH-7100C-4M
9.52	9/16-18UNF	(Left) 3/8-24UNF	15.8	0.7	GKLH-7100C-6M
14.2	13/16-16UN	(Left) 9/16-18UNF	22.2	1	GKLH-7100C-9M-S

Coned & Threaded Connection MP type



1. All wetted parts of Valves, Unions and Fittings in this catalog should be with non-corrosive gases only.
2. Please use each valve after confirming the instruction manual and daily inspection manual.

Ultra Low Temperature Valves For Liquefied Hydrogen(Shut-off Valves),Low pressure type

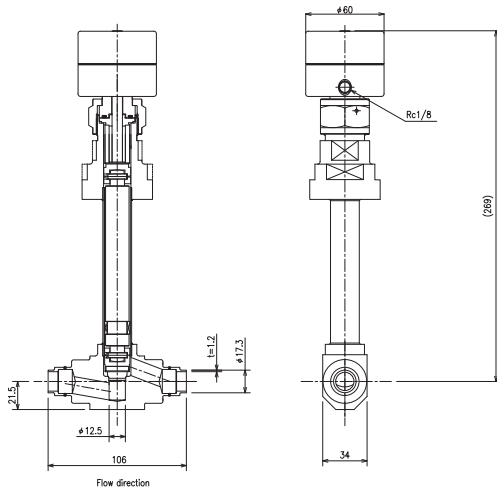

Features


1. Compact actuator
2. High sealing performance by bellows
3. High-Flowrate (Cv value of 2.4)

Specifications(example)

Design Pressure	1 MPa
Design Temperature	-253 to +85°C
Body Materials	SUS316L

■ **Ordering No.** APR-UBF-51JCC-*** (example)

Ultra Low Temperature Valves For Liquefied Hydrogen(Manual Valves),Low pressure type

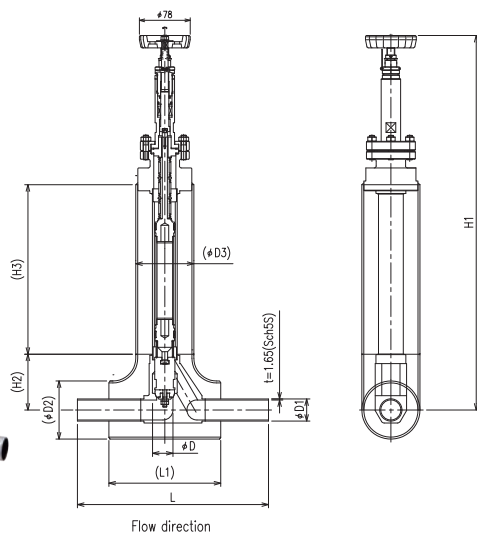

Features

1. High sealing performance by bellows
2. High-Flowrate (Cv value of 9)

Specifications(example)

Design Pressure	2 MPa
Design Temperature	-253 to +75°C
Body Materials	SUS316L

Dimensions, Ordering No.

Nominal size		D	D1	L	H1	JACKET (Reference)					Cv value MAX.	Ordering No
A	B					D2	L2	D3	H2	H3		
15	1/2	16	21.7	165	478	60.5	127	60.5	63.5	177	3.9	ULD-52BCGLD
25	1	25	34	293	588	89.1	171.4	89.1	85.7	260	9	ULD-52BCGLF



1. All wetted parts of Valves, Unions and Fittings in this catalog should be with non-corrosive gases only.
2. Please use each valve after confirming the instruction manual and daily inspection manual.

Coned-and-Threaded Connection


Features

1. Metal seal construction, extremely airtight.
2. No need to weld due to screwed to tube end.

Note: Please refer to No.5 on page 14-No.6 on page 15 for dimensions and precision of tube threading and cone machining.

Specifications

Maximum operating pressure and temperature are changeable according to the materials and thickness of the tubes. Please contact Fujikin before ordering.




GUJU-H Type

Coned-and-Threaded Connection High-Pressure (HP) Type

Body


Note 1: Nominal diameter 6.35 and 9.52 are for the 60,000 psi type, and nominal diameter 14.2 is for the 40,000 psi type.

■ Straight Union

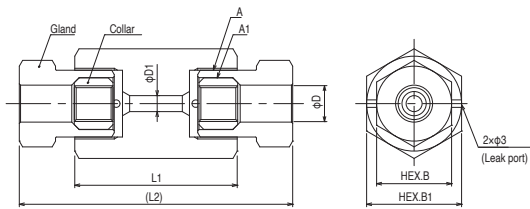


Tube Outer Diameter D	Gland Thread A	Collar Thread A1	L1	L2	D1	B	B1	Ordering No.
6.35	9/16-18UNF	(Left)1/4-28UNF	40	64	2.4	15.9	24	GUJU-F-4H-N
9.52	3/4-16UNF	(Left)3/8-24UNF	55	87	3.2	20.6	27	GUJU-F-6H-N
14.2	1-1/8-12UNF	(Left)9/16-18UNF	65	111	6.4	30.2	38	GUJU-F-9H-N

■ Union Elbows

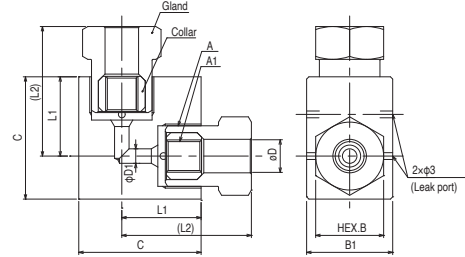


Tube Outer Diameter D	Gland Thread A	Collar Thread A1	C	L1	L2	D1	B	B1	Ordering No.
6.35	9/16-18UNF	(Left)1/4-28UNF	34.5	22.5	34.5	2.4	15.9	24	GUJU-L-4H-N
9.52	3/4-16UNF	(Left)3/8-24UNF	41	27.5	43.5	3.2	20.6	27	GUJU-L-6H-N
14.2	1-1/8-12UNF	(Left)9/16-18UNF	54	35	58	6.4	30.2	38	GUJU-L-9H-N

■ Union Tees

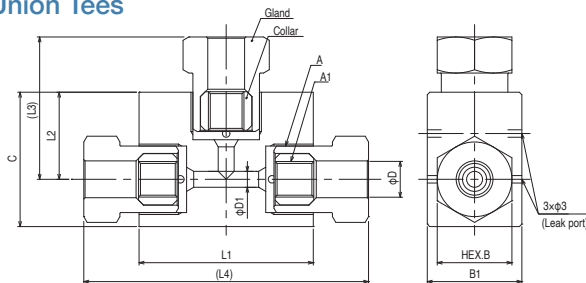


Tube Outer Diameter D	Gland Thread A	Collar Thread A1	C	L1	L2	L3	L4	D1	B	B1	Ordering No.
6.35	9/16-18UNF	(Left)1/4-28UNF	34.5	45	22.5	34.5	69	2.4	15.9	24	GUJU-T-4H-N
9.52	3/4-16UNF	(Left)3/8-24UNF	41	55	27.5	43.5	87	3.2	20.6	27	GUJU-T-6H-N
14.2	1-1/8-12UNF	(Left)9/16-18UNF	54	70	35	58	116	6.4	30.2	38	GUJU-T-9H-N

■ Cross Union

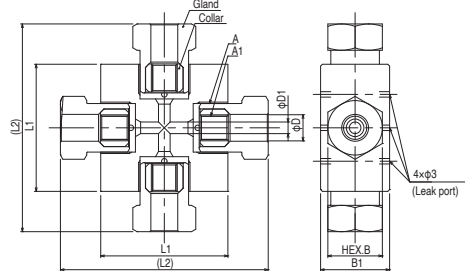

Tube Outer Diameter D	Gland Thread A	Collar Thread A1	L1	L2	D1	B	B1	Ordering No.
6.35	9/16-18UNF	(Left)1/4-28UNF	45	69	2.4	15.9	24	GUJU-X-4H-N
9.52	3/4-16UNF	(Left)3/8-24UNF	55	87	3.2	20.6	27	GUJU-X-6H-N
14.2	1-1/8-12UNF	(Left)9/16-18UNF	70	116	6.4	30.2	38	GUJU-X-9H-N

Collar & Gland

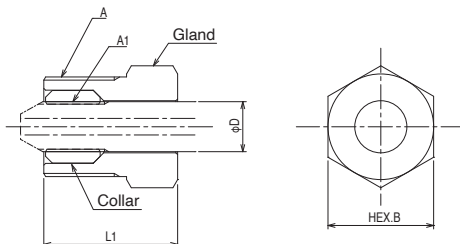

Tube Outer Diameter D	Gland Thread A	Collar Thread A1	L1	B	Ordering No.
6.35	9/16-18UNF	(Left)1/4-28UNF	21	15.9	GUJU-4HCN
9.52	3/4-16UNF	(Left)3/8-24UNF	29	20.6	GUJU-6HCN
14.2	1-1/8-12UNF	(Left)9/16-18UNF	38	30.2	GUJU-9HCN

Materials

Parts	Materials
Body	SUS316 (Ni equivalent of 28.5 or higher, area reduction of 75% or higher)
Gland	ASTM A479 316
Collar	ASTM A479 316



Caution


All wetted parts of Valves, Unions and Fittings in this catalog should be with non-corrosive gases only.

GUJU-M Type

Coned-and-Threaded Connection Medium Pressure (MP) Type


Body

■ Straight Union

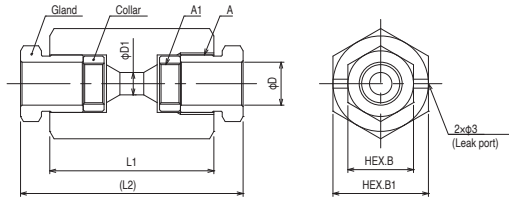


Tube Outer Diameter	Gland Thread	Collar Thread	L1	L2	D1	B	B1	Ordering No.
D	A	A1						
6.35	7/16-20UNF	(Left)1/4-28UNF	35	53	2.8	12.7	19	GUJU-F-4M-N
9.52	9/16-18UNF	(Left)3/8-24UNF	45	63	5.2	15.8	26	GUJU-F-6M-N
14.2	13/16-16UN	(Left)9/16-18UNF	55	75	7.9	22.2	32	GUJU-F-9M-N
19.05	3/4-14NPS	(Left)3/4-16UNF	65	94	11.1	30.2	40	GUJU-F-12M-N
25.4	1-3/8-12UNF	(Left)1-14UNS	100	131	14.3	34.9	50	GUJU-F-16M-N

■ Union Elbows

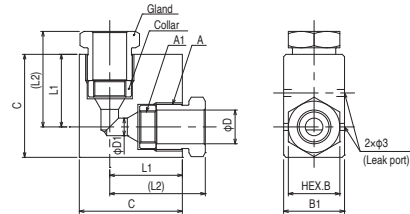


Tube Outer Diameter	Gland Thread	Collar Thread	L1	L2	D1	C	B	B1	Ordering No.
D	A	A1							
6.35	7/16-20UNF	(Left)1/4-28UNF	20	29	2.8	29	12.7	18	GUJU-L-4M-N
9.52	9/16-18UNF	(Left)3/8-24UNF	25.5	34.5	5.2	36	15.8	20	GUJU-L-6M-N
14.2	13/16-16UN	(Left)9/16-18UNF	31	41	7.9	44	22.2	26	GUJU-L-9M-N
19.05	3/4-14NPS	(Left)3/4-16UNF	40	54.5	11.1	60	30.2	40	GUJU-L-12M-N
25.4	1-3/8-12UNF	(Left)1-14UNS	55	70.5	14.3	80	34.9	50	GUJU-L-16M-N

■ Union Tees

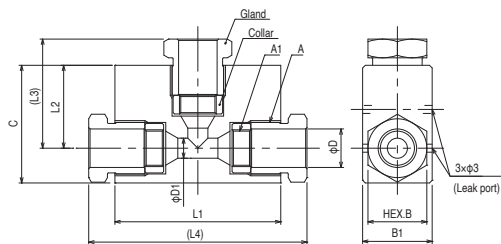


Tube Outer Diameter	Gland Thread	Collar Thread	L1	L2	L3	L4	D1	C	B	B1	Ordering No.
D	A	A1									
6.35	7/16-20UNF	(Left)1/4-28UNF	40	20	29	58	2.8	29	12.7	18	GUJU-T-4M-N
9.52	9/16-18UNF	(Left)3/8-24UNF	51	25.5	34.5	69	5.2	36	15.8	20	GUJU-T-6M-N
14.2	13/16-16UN	(Left)9/16-18UNF	62	31	41	82	7.9	44	22.2	26	GUJU-T-9M-N
19.05	3/4-14NPS	(Left)3/4-16UNF	80	40	54.5	109	11.1	60	30.2	40	GUJU-T-12M-N
25.4	1-3/8-12UNF	(Left)1-14UNS	110	55	70.5	141	14.3	80	34.9	50	GUJU-T-16M-N

■ Cross Union

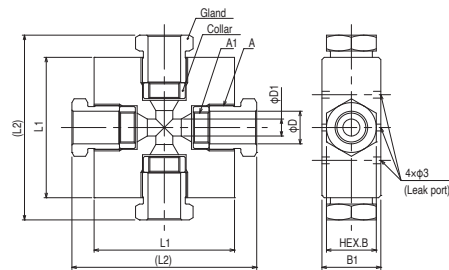

Tube Outer Diameter	Gland Thread	Collar Thread	L1	L2	D1	B	B1	Ordering No.
D	A	A1						
6.35	7/16-20UNF	(Left)1/4-28UNF	40	58	2.8	12.7	18	GUJU-X-4M-N
9.52	9/16-18UNF	(Left)3/8-24UNF	51	69	5.2	15.8	20	GUJU-X-6M-N
14.2	13/16-16UN	(Left)9/16-18UNF	62	82	7.9	22.2	26	GUJU-X-9M-N
19.05	3/4-14NPS	(Left)3/4-16UNF	80	109	11.1	30.2	40	GUJU-X-12M-N
25.4	1-3/8-12UNF	(Left)1-14UNS	110	141	14.3	34.9	50	GUJU-X-16M-N

Collar & Gland

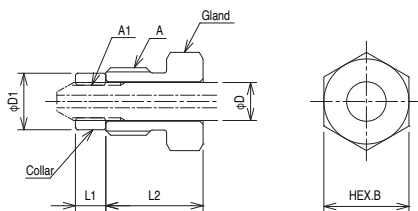

Tube Outer Diameter	Gland Thread	Collar Thread	D1	L1	L2	B	Ordering No.
D	A	A1					
6.35	7/16-20UNF	(Left)1/4-28UNF	9.2	5	16	12.7	GUJU-4MCN
9.52	9/16-18UNF	(Left)3/8-24UNF	12.2	5.5	18	15.8	GUJU-6MCN
14.2	13/16-16UN	(Left)9/16-18UNF	18.5	7	21	22.2	GUJU-9MCN
19.05	3/4-14NPS	(Left)3/4-16UNF	11.1	9.5	25.5	30.2	GUJU-12MCN
25.4	1-3/8-12UNF	(Left)1-14UNS	14.3	12.7	35	34.9	GUJU-16MCN

Materials

Parts	Materials
Body	SUS316 (Ni equivalent of 28.5 or higher, area reduction of 75% or higher)
Gland	ASTM A479 316
Collar	ASTM A479 316



Piping Installation Guidelines


1. Introduction

- 1-1. Our stainless steel high pressure and medium pressure fittings are carefully designed and manufactured, and subjected to strict quality control, down to the smallest detail utilizing the technical expertise we have built up over many years as precision fittings manufacturers, and we therefore ask that care be taken when installing and utilizing those products.
- 1-2. Any installation of piping utilizing stainless steel high pressure and medium pressure fittings should be carried out by a person or persons thoroughly familiar and experienced with those fittings.
- 1-3. Stainless steel high pressure and medium pressure fittings should not be used in locations subject to excessively repetitive conditions, vibrations, impacts, pulsations, etc.
- 1-4. Customers who will be repeatedly using the same product should inform Fujikin when there is a change in usage condition or method in order to avoid any problems before they arise.

2. Basic Structural Overview

- 2-1. The fittings have concentrically conical-shaped body and tube seal sections as well as a preciously finished surface, making them highly airtight coned-and-threaded-type fittings which also utilize a metallic seal method.
- 2-2. The basic structural components are comprised of a stainless steel body, collars, glands and connecting tubes.
- 2-3. The sealing principle of the fittings involves tightening the glands using a wrench, etc., to tightly affix the cone tip-processed tube to the body.

■ Fitting Structural Drawing

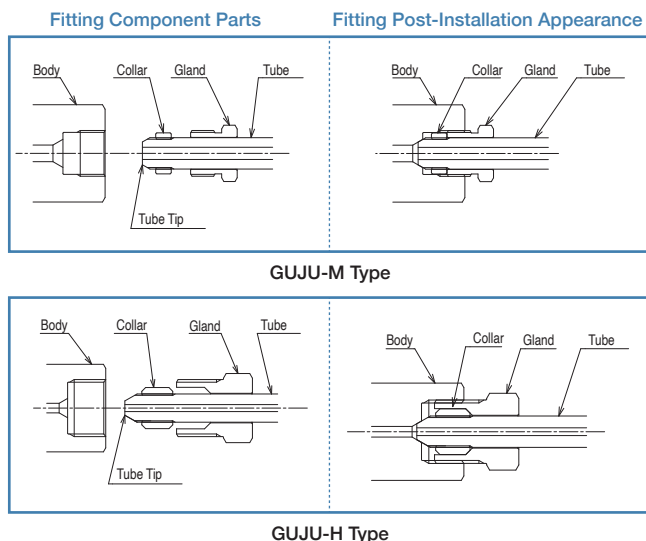

3. Design Specifications

- 3-1. Maximum Operating Pressure, Temperature Range
100MPa, -40 ~ +85 °C ★
★: Varies according to the materials and thickness of the tubes used.
Please contact Fujikin before ordering.
- 3-2. Body Material
SUS316
(Ni equivalent of 28.5 or higher, area reduction of 75% or higher)

3-3. Nominal Diameter 6.35, 9.52, 14.2, 19.05, 25.4

3-4. Hydrogen gas and other gases and liquids which are non-corrosive to stainless steel, and which are the primary constituent material, may be used.




4. Important Considerations for Selections

Incorrect device selection and handling can lead to system problems and accidents. It is therefore important to fully consider the compatibility of devices with the systems in which they are used, as well as the conditions under which they are used, as the authority and responsibility for device selection left up to the customer. Also, it is important to have a full understanding of the specification range of a given device before utilizing it.


5. Fitting Installation Guidelines

(Installation guidelines are the same for GUJU-M Type and GUJU-H Type)

- 5-1. Assemble the parts of the fitting according to each step as below. Perform cone processing of the tube tip according to the figure on the next page.




- 5-2. Put the gland onto the tube and then affix the threaded section of the tube tip to the collar. (The tube threading is left-handed. Please remember this when affixing.)
Apply a small amount of fluorinated grease to the tube tip.




- 5-3. Screw the collar with your fingers until it cannot turn any further and one or two thread ridges are visible on the tube tip side.

- 5-4. Screw the tube and gland together into the fitting (valve) body.

Then, put a match marking ★ on the body and the gland. This represents the zero point for tightening.
(★: The red lines in the photograph)



- 5-5. Using a wrench, tighten the gland by a 1/8 - 1/6 turn from the zero point.
(When tightening the gland, always make sure to hold the body in place.)
No further tightening is needed.




Nominal Diameter	Tightening Torque (N·m)	
	GUJU-H Type High Pressure (HP) Type	GUJU-M Type Medium Pressure (MP) Type
6.35	21	14
9.52	43	25
14.2	90	40
19.05	—	120
25.4	—	200



Caution

All wetted parts of Valves, Unions and Fittings in this catalog should be with non-corrosive gases only.

5-6. Tube Tip Processing Dimensions

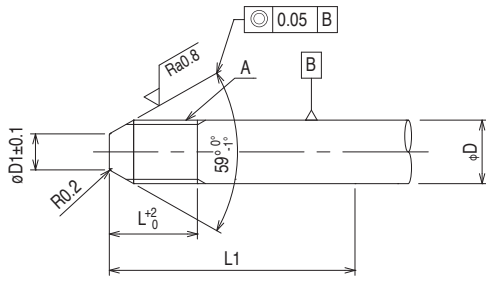

Nominal Diameter D	Fitting Types	Tube Tip Processing Dimensions				Accessory Part No. *4	
		A *2	D1	L	L1	Collar	gland
6.35	MP Type	(Left)1/4-28UNF	3.6	8.8	35	GUJU-4MC	GUJU-4MN
9.52		(Left)3/8-24UNF	6.4	11.2	40	GUJU-6MC	GUJU-6MN
14.2		(Left)9/16-18UNF	10.3	12.7	50	GUJU-9MC	GUJU-9MN
19.05		(Left)3/4-16UNF	14.3	15.9	65	GUJU-12MC	GUJU-12MN
25.4		(Left)1-14UNS	18.3	19.9	85	GUJU-16MC	GUJU-16MN
6.35	HP Type	(Left)1/4-28UNF	3.2	14.3	40	GUJU-4HC	GUJU-4HN
9.52		(Left)3/8-24UNF	5.6	19.1	50	GUJU-6HC	GUJU-6HN
14.2		(Left)9/16-18UNF	7.9	24	70	GUJU-9HC	GUJU-9HN

*1: After cutting the tube with an appropriate tool, please perform tube tip as above to the above length.


*2: Regarding thread grade, processing should be performed at 2A or higher.

*3: When bending tube, please keep straight tube above length as L1 or more.

*4: If you use other parts, please consult with Fujikin in advance.

*: Please consult with Fujikin about coned-and-threaded machining also.

5-7. Mechanical Finished Dimensions (Female Thread Side)

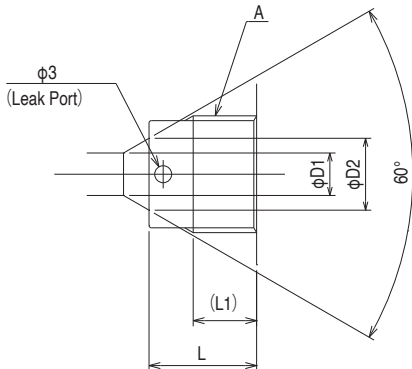

Nominal Dia.	Fitting Types	A	L	L1	D1	D2
6.35	MP Type	7/16-20UNF	12.7	7.1	2.8	4.8
9.52		9/16-18UNF	15.8	9.7	5.2	7.9
14.2		13/16-16UN	19	11.2	7.9	12.7
19.05		3/4-14NPS	23.9	12.7	11.1	15.8
25.4		1-3/8-12UNF	33.3	20.6	14.3	22.4
6.35	HP Type	9/16-18UNF	11.2	9.7	2.4	4.3
9.52		3/4-16UNF	15.8	13.5	3.2	6.6
14.2		1-1/8-12UNF	19.1	15.8	6.4	9.7



6. Caution Regarding Installation

6-1. Please use tubes and fittings without scratches in the tube end and sealing area of fittings.

6-2. After cutting the tube, please remove burr of the cut cross-section; also, make sure the cross-section is at a right angle to the long axis of the tube.

7. Removal and Re-tightening Procedure

7-1. To remove, use a wrench or other appropriate tool to turn the gland half-rotations in a anti-clockwise direction.

7-2. When re-tightening, the guidelines are exactly the same as those given in Item 5.

Note 1: If you accidentally drop the fitting part, please check the body and tube seal section for scratches or any adhering material before using.

If a scratch is discovered, please replace the part, because it will cause leakage.

If adhering material is discovered, lightly wipe the part with a clean cloth until the material is completely removed.

Do not use an organic solvent when cleaning, as this will also remove the lubricant from the seal section.

Note 2: Please make sure to use a suitable wrench to a hexagonal gland.

Note 3: When disassembling, please protect the sealing part of fittings to avoid scratch.



8. Caution After Piping

8-1. After piping, check all sections again to ensure that joined sections are not loose and that fittings are mounted in the prescribed manner.

8-2. After the stainless steel high-pressure/medium-pressure fittings and tube are joined, the person performing installation should conduct a final check of overall air-tightness.

8-3. If you change tube orientation after all joining has been completed, only do so after first loosening the gland.

Adjusting the tube's orientation without first loosening the gland can scratch the fitting seal's surface.

8-4. When purging gas, ensure beforehand that the gland is not loose.

Loosening the gland when the system is under high pressure can result in a sudden and dangerous venting of the liquid inside the system from the spaces between the body leak port and the gland and sleeve.



9. Troubleshooting Here

Proper installation of this fitting will ensure no leakage occurs; however, performing installation in locations where it is difficult to assemble and joins parts or which are at an extreme angle can, on rare occasions, result in leakage.

In such cases, first release the pressure and then perform a 1/16th turn tightening. If this does not resolve the problem, release the pressure again, disassemble the fitting, check the body and tube tip seal surfaces for scratches or adhering material, and then re-tightening the fitting according to the guidelines.

If a scratch is discovered, please replace the part, as not doing so could result in leakage.

If adhering foreign matter is discovered, lightly wipe the part with a clean cloth until it is completely removed. Do not use an organic solvent or other agent when cleaning, as this will also remove the lubricant from the seal section.



Adapters

Features

1. Metal seal construction makes it extremely airtight
2. No need to weld due to screwed to tube end.

Note: Please refer to No.5 on page 14-No.6 on page 15 for dimensions and precision of tube threading and cone machining.


Specifications

Maximum operating pressure and temperature are changeable according to the materials and thickness of the tubes.
Please contact Fujikin before ordering.

Materials


Part	Materials
Body	SUS316 (Ni equivalent of 28.5 or higher, area reduction of 75% or higher)
Gland	ASTM A479 316
Collar	ASTM A479 316

Male (HP) × Female (HP)

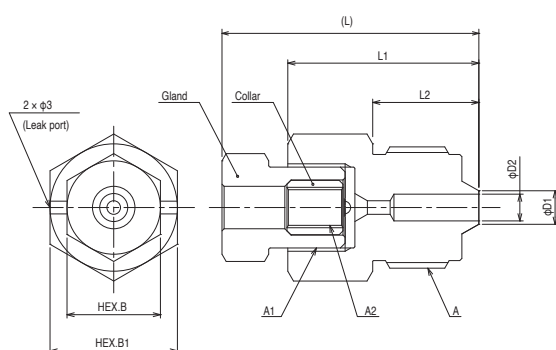

Nominal size	Thread	Nominal size	Gland Thread	Collar Thread	L	L1	L2	D1	D2	B	B1	Ordering No
1	A	2	A1	A2								
14.2	1-1/8-12UNF	6.35	9/16-18UNF	(Left) 1/4-28UNF	52	40	25	7.9	6.3	15.9	30	GUJB-9HX4H-N
14.2	1-1/8-12UNF	9.52	3/4-16UNF	(Left) 3/8-24UNF	61	45	25	7.9	6.3	20.6	30	GUJB-9HX6H-N

Male (HP) × Female (MP)

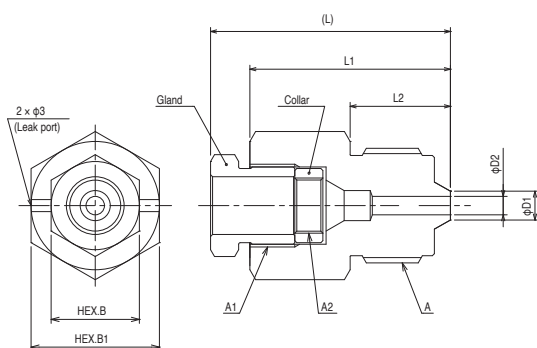

Nominal size	Thread	Nominal size	Gland Thread	Collar Thread	L	L1	L2	D1	D2	B	B1	Ordering No
1	A	2	A1	A2								
6.35	9/16-18UNF	6.35	7/16-20UNF	(Left) 1/4-28UNF	45	36	16	3.2	2.1	12.7	21	GUJB-4HX4M-N
9.52	3/4-16UNF	9.52	9/16-18UNF	(Left) 3/8-24UNF	49	40	20	5.6	3.2	15.8	24	GUJB-6HX6M-N
14.2	1-1/8-12UNF	14.2	13/16-16UNF	(Left) 9/16-18UNF	55	45	25	7.9	6.4	22.2	30	GUJB-9HX9M-N

Note: Please consult Fujikin about different connections.




Caution

All wetted parts of Valves, Unions and Fittings in this catalog should be with non-corrosive gases only.

Fusible-plug Type Pressure Relief Devices / Container Main Valves

Fusible-plug Type Pressure Relief Devices (PRD)

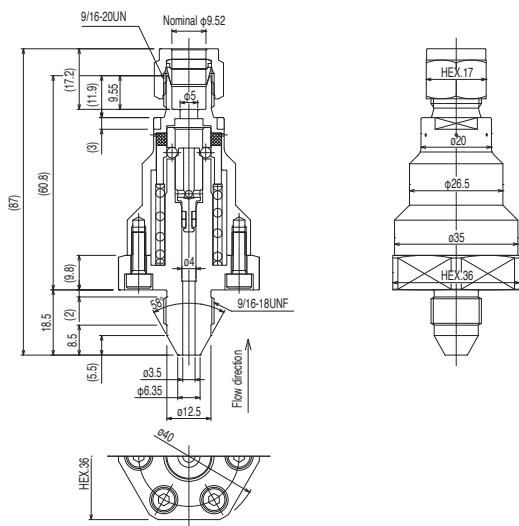


Specifications (example)

Design Pressure	95 MPa
Design Temperature	85 °C
Body materials	SUS316L

Ordering No. URF-795-6.35-DSH (example)

Container Main Valves

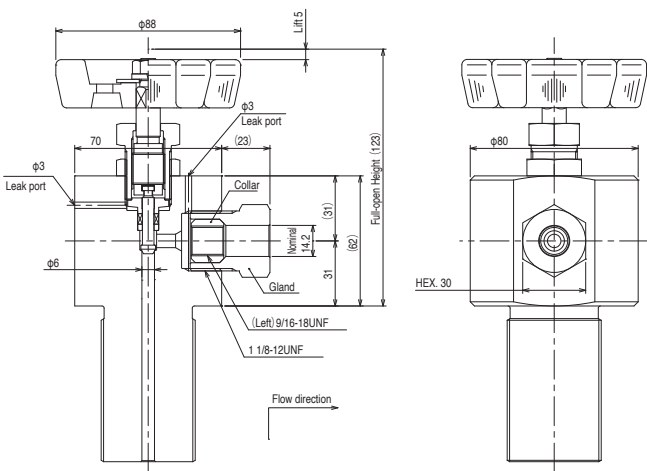

Features

1. Compact and with Durable Manual Valves
2. We will produce an interface with a container in the specified shape.

Specifications

Design Pressure	99.9 MPa
Fluid temperature range	-40 to +85 °C
Ambient temperature range	-40 to +60 °C
Body materials	SUS316 (Ni equivalent of 28.5 or higher, area reduction of 75% or higher)

Ordering No. GUH-8100-9H-N- * * * (example)



1. All wetted parts of Valves, Unions and Fittings in this catalog should be with non-corrosive gases only.
2. Please use each valve after confirming the instruction manual and daily inspection manual.

MEMO

[illegible]

UPG® High Performance Metal Gasket Fittings for Ultra High-Pressure Hydrogen Gas



Features

1. Excellent Air Tightness

- The unique seal structure realizes excellent airtightness.
- Metal gasket type with small load on pressure-resistant parts even when detaching is repeated.

2. Excellent Installation and Operability


- No need for an axial space for detaching the device when detaching / removing.
- Construction instructions include rotation control and overtightening prevention mechanism.
- Compared to coned-and-threaded joint, construction with low torque can be done.

3. Excellent Scalability

- Excellent vibration proof is achieved by separating the part to be sealed and the part receiving the external force.
- Lineup includes two pressure series: 95 MPa and 50 MPa.





Construction

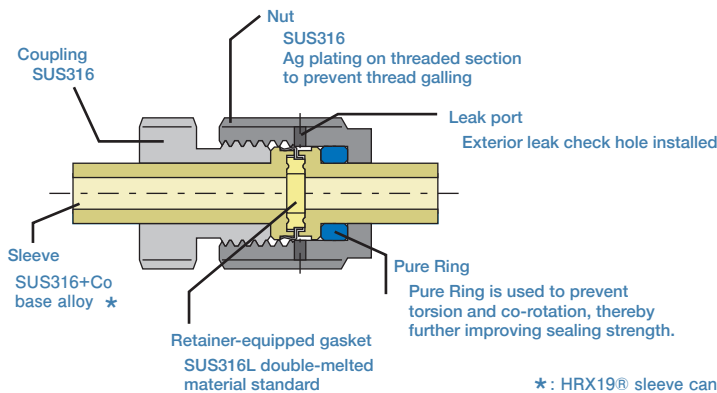



* : HRX19® sleeve can be also manufactured.

Comparison with Coned-and-threaded connection

Construction

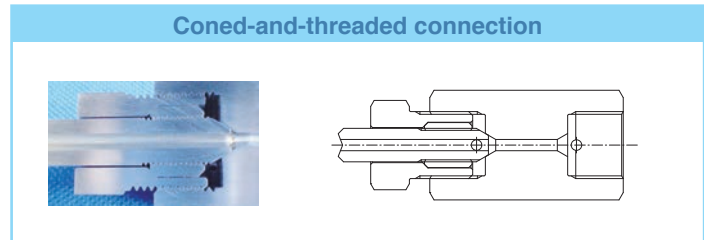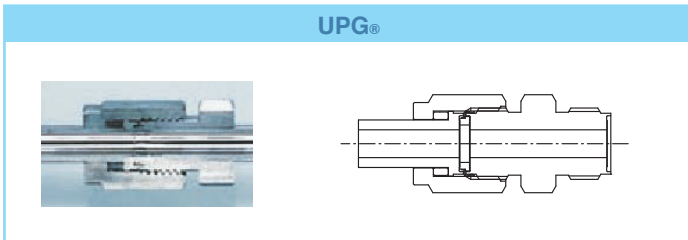

Removability

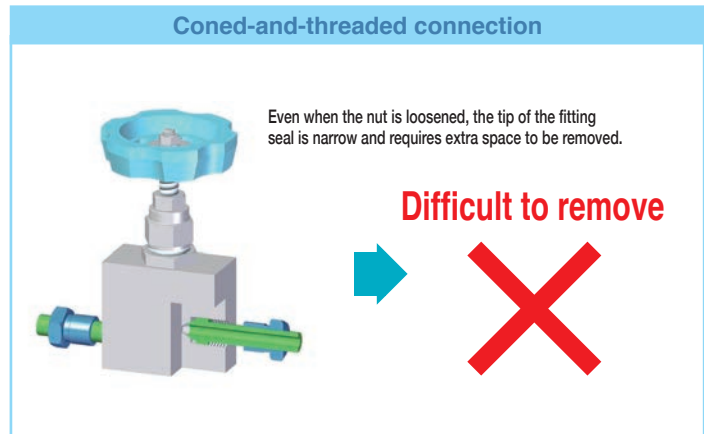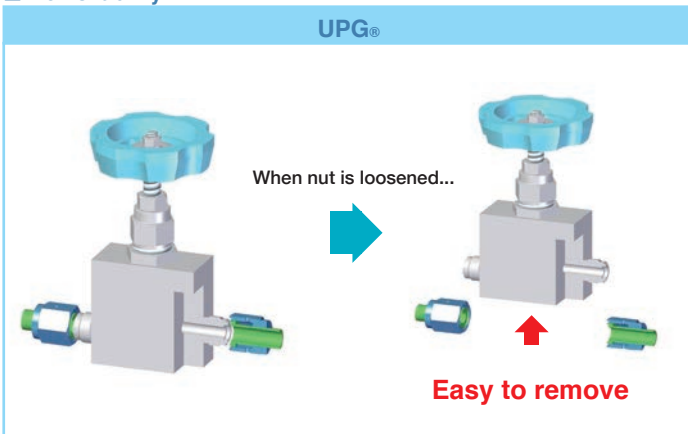

HRX 19® is a registered trademark of NIPPON STEEL CORPORATION.




Piping Installation Guidelines


(50 MPa UPG® fitting, 95 MPa UPG® fitting)

1. With the union nut already installed, weld the tube onto the sleeve. (When welding, please flow inert gas to prevent oxidation. When removing the protective cap from the seal, be careful not to damage it.)


If there is some time between welding and tightening, reattach the protective cap after cooling down sufficiently.

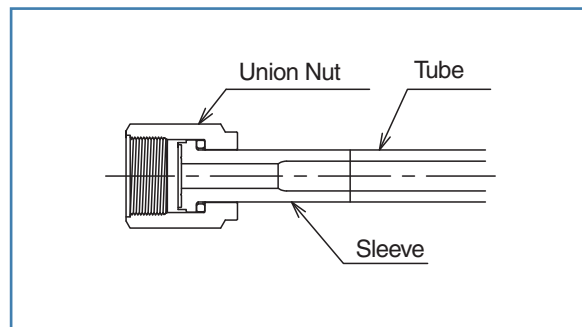


2. Attach the gasket with retainer to either the body or the sleeve end. Hand-tighten the nut until the body, gasket, and sleeve are in tight contact.

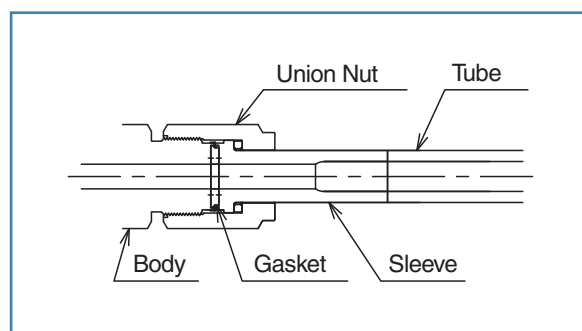


3. Scribe a line with a felt-tip maker on the body and union nut. This will be your zero reference point.

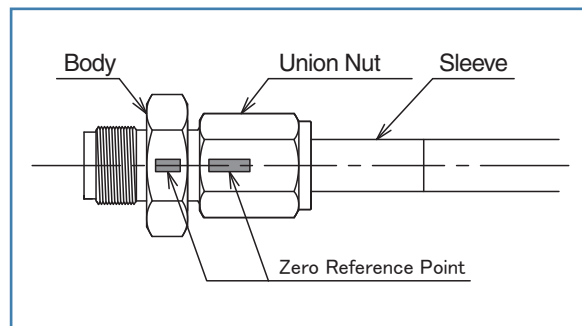

4. With the body held stationary and nothing the reference point, tighten the union nut with a wrench 90°. Complete!

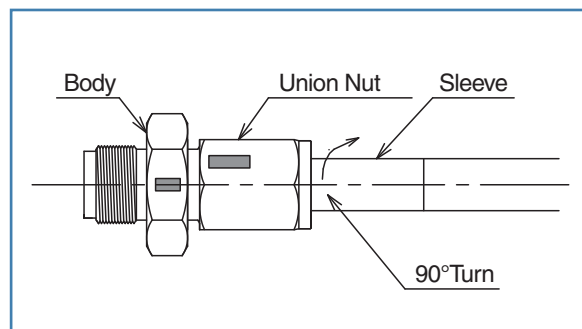

 Important Note: If it is over-tightened, the UPG® seal will deform and seize, making it impossible to reuse it.



Caution

All wetted parts of Valves, Unions and Fittings in this catalog should be with non-corrosive gases only.

95 MPa UPG® Fittings


Features

Design Pressure	95 MPa
Temperature Range	-40 ~ +50 °C
Nominal Diameter	6.35, 9.52, 12.7
Main Materials	SUS316 (Ni equivalent of 28.5 or higher, area reduction of 75% or higher)(Sleeve: HRX 19®)



Dimensional Drawings


95 MPa Type UPG® Nut

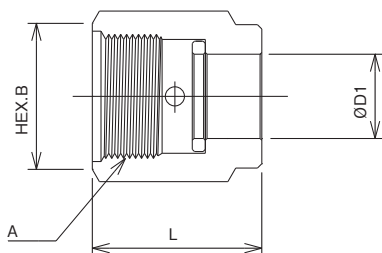

Nominal Diameter	D1	A	B	L	Ordering No.	※
6.35	6.35	7/16-20UNF	14	20	UPG-6.35N-95M	
6.35	6.35	7/16-20UNF	14	21.5	UPG-6.35N-95M-L	
9.52	9.52	9/16-20UN	17	22.5	UPG-9.52N-95M	
9.52	9.52	9/16-20UN	17	24	UPG-9.52N-95M-L	
12.7	12.7	3/4-20UNEF	22	25	UPG-12.7N-95M	
12.7	12.7	3/4-20UNEF	22	27.2	UPG-12.7N-95M-L	


*please select when using coupling

95 MPa Type UPG® Sleeve

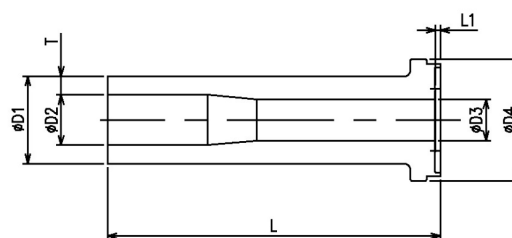


Nominal Diameter D1	D2	D3	D4	L	L1	Ordering No.
6.35	3.5	3.2	9.8	50	0.7	UPG-6.35S-95M-L50-HRX19
9.52	5.12	4.35	13	50	0.7	UPG-9.52S-95M-L50-HRX19
12.7	7.3	6	16.7	50	0.7	UPG-12.7S-95M-L50-HRX19

95 MPa Type UPG® Gasket with Retainer



Nominal Diameter	D1	D2	D3	L	L1	Ordering No.
6.35	3.2	7.5	9.8	1.96	2.48	UPG-6.35G-95M
9.52	4.3	10.9	12.95	1.96	2.88	UPG-9.52G-95M
12.7	6	14.9	17.65	1.96	2.88	UPG-12.7G-95M

95 MPa Type UPG® Coupling Body



Nominal Diameter	D	A	B	L	Ordering No.
6.35	6.5	7/16-20UNF	14	13.5	UPG-C-6.35-95M
9.52	9.67	9/16-20UN	17	15	UPG-C-9.52-95M
12.7	12.85	3/4-20UNEF	22	18.8	UPG-C-12.7-95M


HRX 19® is a registered trademark of NIPPON STEEL CORPORATION.



1. All wetted parts of Valves, Unions and Fittings in this catalog should be with non-corrosive gases only.
2. Please use each valve after confirming the instruction manual and daily inspection manual.

Features

- ## Flow Control Valves with 95 MPa UPG® Fittings

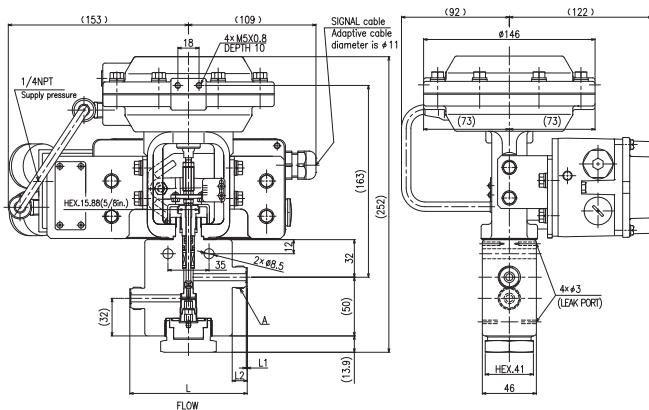


Features

- ## ■ Specifications

■ Specifications

*:indicates the Cv value number
(Refer to "Combination of Cv Value and Rangeability" on page 30.)

Shut-off Valves with 95 MPa UPG® Fittings

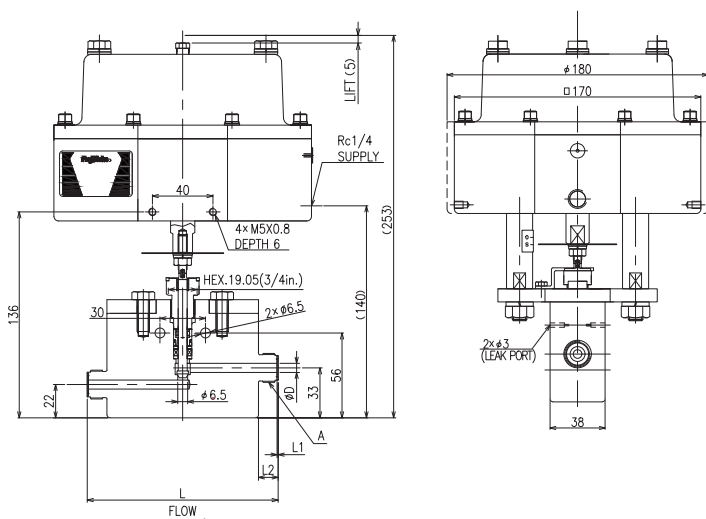

Features

- ## ■ Specifications


■ **Dimensions, Ordering No.**

Nominal Diameter	Connection			THREAD	L	Cv value MAX.	Ordering No
	D	L1	L2	A			
9.52	4.35	0.7	11	9/16-20UN	122	0.45	APR-GUH-795-6G-N
12.7	6	0.7	12.8	3/4-20UNEF	126	0.81	APR-GUH-795-8G-N



- 22

Manual Valves with 95 MPa UPG® Fittings

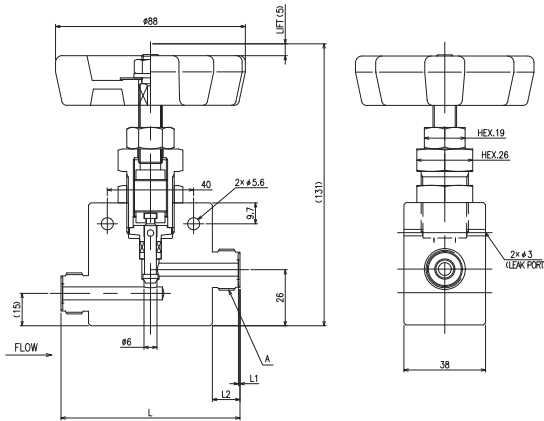

Features

1. Compact and with Durable Manual Valves
2. With Lock Nut


Specifications

Design Pressure	95 MPa
Fluid temperature range	-40 to +50 °C
Note: When using in a pre-cool line, please select the valve for precool low temperature type	
Ambient temperature range	-40 to +50 °C
Body materials	SUS316 (Ni equivalent of 28.5 or higher, area reduction of 75% or higher)

Dimensions, Ordering No.

Nominal Diameter	Connection			THREAD	L	Cv VALUE	Ordering No
	D	L1	L2				
9.52	4.35	0.7	11	9/16-20UN	79.4	0.47	GUH-795L-6G-N
12.7	6	0.7	12.8	3/4-20UNEF	83	0.75	GUH-795L-8G-N

Check Valves with 95 MPa UPG® Fittings

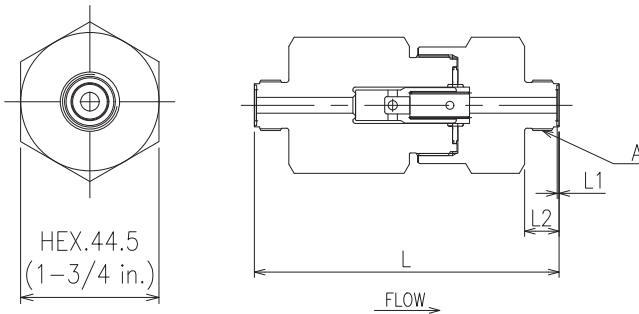

Features

1. Compact, in-line type
2. Little pressure drop to optimal flow pass


Specifications

Design Pressure	95 MPa
Fluid temperature range	-40 to +50 °C
Ambient temperature range	-40 to +50 °C
Body materials	SUH 660
Cracking pressure	Under 0.0069 MPa
Flow rate	Over 40 m³/h normal
Differential pressure (Reverse Pressure)	Over 10 MPa

Dimensions, Ordering No.

Nominal Diameter	Connection			THREAD	L	Cv VALUE	Ordering No
	D	L1	L2				
9.52	4.35	0.7	11	9/16-20UN	111.4	0.25	GUCL-795-6G-N
12.7	6	0.7	12.8	3/4-20UNEF	115	0.83	GUCL-795-8G-N

Filters with 95 MPa UPG® Fittings

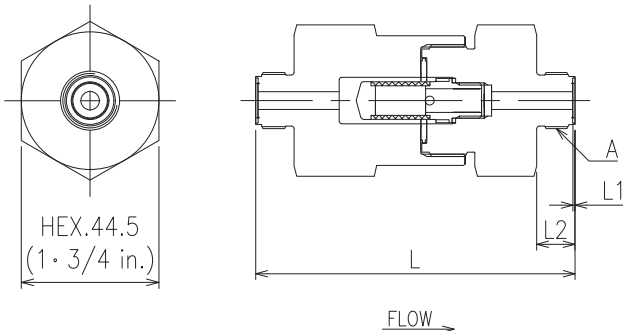

Features

1. Compact, in-line type
2. Little pressure drop to optimal flow pass

Specifications

Design Pressure	95 MPa
Fluid temperature range	-40 to +50 °C
Ambient temperature range	-40 to +50 °C
Body materials	SUH660

Dimensions, Ordering No.

Nominal Diameter	Connection			THREAD	L	Ordering No
	D	L1	L2			
9.52	4.35	0.7	11	9/16-20UN	104.4	GUFL-795-6G-★1-N
12.7	6	0.7	12.8	3/4-20UNEF	108	GUFL-795-8G-★1-N

★1: Element size number is added.
(Refer to ⑥ in "Manual Valve/Check Valve/Filter Part Number" on page 31.)



1. All wetted parts of Valves, Unions and Fittings in this catalog should be with non-corrosive gases only.
2. Please use each valve after confirming the instruction manual and daily inspection manual.

50 MPa UPG® Fittings


Specifications and Materials

Pressure Range	50 MPa
Temperature Range	-45 to +85 °C
Nominal Diameter	6.35, 9.52, 12.7
Main Materials	SUS316 (Ni equivalent of 28.5 or higher, area reduction of 75% or higher)




Dimensional Drawings

50 MPa Type UPG® Nut

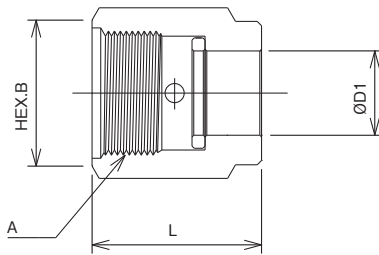

Nominal Diameter	D1	A	B	L	Ordering No.
6.35	6.5	7/16-20UNF	14	17.5	UPG-6.35N-50M
9.52	9.7	9/16-20UNF	17	19.5	UPG-9.52N-50M
12.7	12.9	3/4-20UNEF	22	23	UPG-12.7N-50M


50 MPa Type UPG® Sleeve

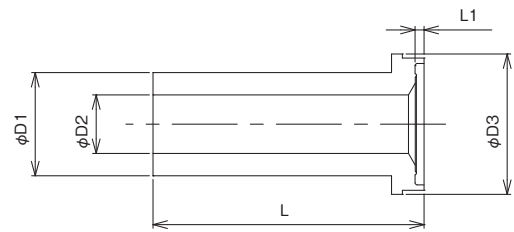

Nominal Diameter D1	D2	D3	L	L1	Ordering No.
6.35	3.9	9.8	23	0.7	UPG-6.35S-L23-50M-N28.5
9.52	5.4	13	31	0.7	UPG-9.52S-L31-50M-N28.5
9.52	5.4	13	38	0.7	UPG-9.52S-L38-50M-N28.5 *
12.7	8	17.7	33	0.7	UPG-12.7S-L33-50M-N28.5
12.7	8	17.7	44	0.7	UPG-12.7S-L44-50M-N28.5 *


*1: Please select when using Coupling.

50 MPa Type UPG® Gasket with Retainer



Nominal Diameter	D1	D2	D3	L	L1	Ordering No.
6.35	4.4	7.5	9.8	1.96	2.48	UPG-6.35G
9.52	7.5	10.9	12.95	1.96	2.88	UPG-9.52G
12.7	10.2	14.9	17.65	1.96	2.88	UPG-12.7G

50 MPa Type UPG® Coupling Body



Nominal Diameter	D	A	B	L	Ordering No.
6.35	6.5	7/16-20UNF	14	13.5	UPG-C-6.35
9.52	9.67	9/16-20UNF	17	15	UPG-C-9.52
12.7	12.85	3/4-20UNEF	22	18.8	UPG-C-12.7




1. All wetted parts of Valves, Unions and Fittings in this catalog should be with non-corrosive gases only.
2. Please use each valve after confirming the instruction manual and daily inspection manual.

Shut-off Valves with UPG® Fittings

Features

1. Fittings are installed without load for surrounding piping by adopting unique metal gasket-type.

Shut-off Valves with 50 MPa UPG® Fittings

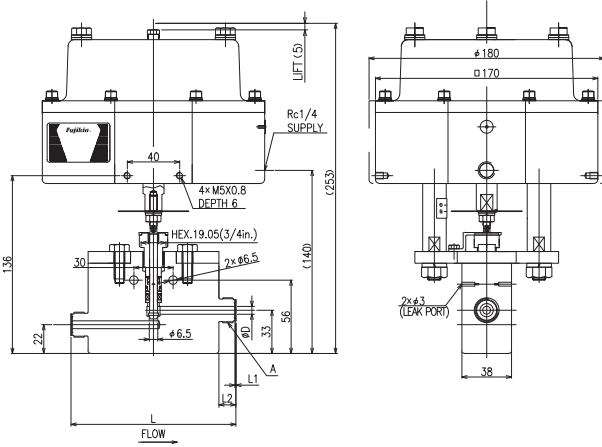

Specifications

Design Pressure	50 MPa
Fluid Temperature Range	-40 to +85 °C
Ambient Temperature	-40 to +60 °C
Body materials	SUS316(Ni equivalent of 28.5 or higher, area reduction of 75% or higher)

Dimensions, Ordering No.

Nominal Diameter	Connection			Thread	Interfacial Distance L	Cv Value MAX.	Ordering No.
	D	L1	L2				
6.35	3.9	0.7	10	7/16-20UNF	120	0.4	APR-GUH-750-4G-N
9.52	5.4	0.7	11	9/16-20UN	122	0.7	APR-GUH-750-6G-N
12.7	8	0.7	12.8	3/4-20UNEF	126	1	APR-GUH-750-8G-N

Shut-off Valves with 45 MPa UPG® Fittings




Specifications

Design Pressure	45 MPa
Fluid Temperature Range	-10 ~ +80 °C
Ambient Temperature	-10 ~ +60 °C
Body materials	SUS316+Co base alloy


Dimensions, Ordering No.

Nominal Diameter	Orifice Diameter	Connection					Thread	Interfacial Distance	Cv Value MAX.	Mass (approx.) (kg)	Ordering No.
		D	D1	D2	L1	L2					
6.35	2.6	4	3.9	0.7	10	7/16-20UNF	53.4	0.2	0.9	APR-UM-745-6.35UPG-N28.5	
9.52	2.6	4	5.4	0.7	11	9/16-20UN	55.4	0.2	0.9	APR-UM-745-9.52UPG-N28.5	
12.7	2.6	4	8	0.7	12.8	3/4-20UNEF	59	0.2	0.9	APR-UM-745-12.7UPG-N28.5	

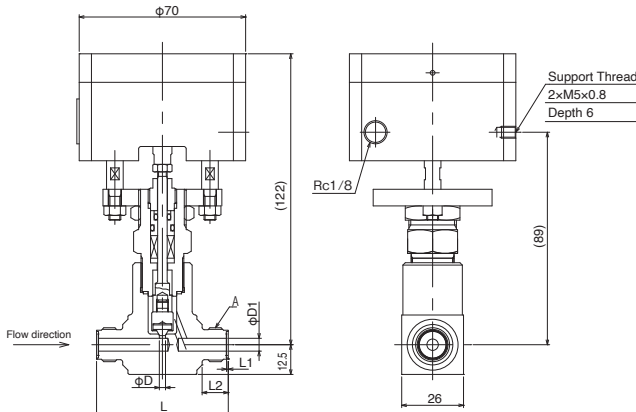

Manual Valves with 50 MPa UPG® Fittings

Global
Series

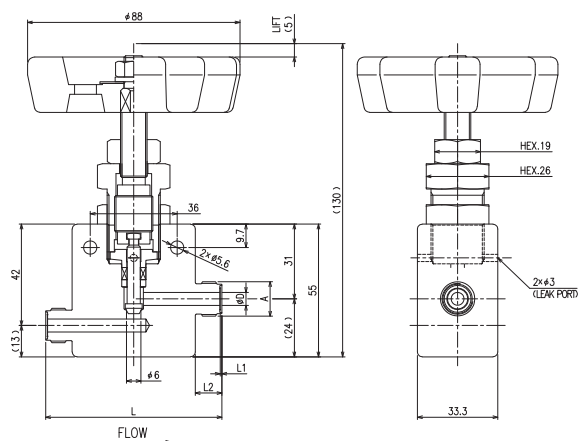

Specifications

Design Pressure	50 MPa
Fluid Temperature Range	-40 ~ +85 °C
Ambient Temperature	-40 ~ +60 °C
Body materials	SUS316 (Ni equivalent of 28.5 or higher, area reduction of 75% or higher)

Dimensions, Ordering No.


Nominal Diameter	Nut connection			Thread	Interfacial Distance	Cv Value MAX.	Ordering No.
	D	L1	L2				
6.35	3.9	0.7	10	7/16-20UNF	71	0.37	GUH-750L-4G-N
9.52	5.4	0.7	11	9/16-20UN	73	0.55	GUH-750L-6G-N
12.7	8	0.7	12.8	3/4-20UNEF	78	1	GUH-750L-8G-N

Check Valves with 50 MPa UPG® Fittings

Features

1. Compact, in-line type
2. Little pressure drop to optimal flow pass

Global
Series

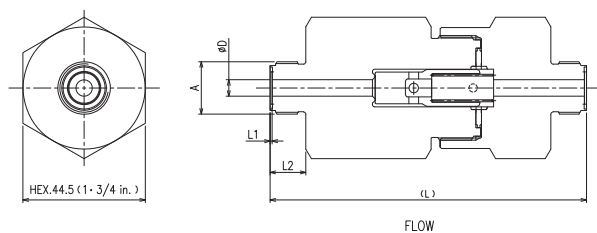

Specifications

Design Pressure	50 MPa
Fluid temperature range	-40 to +85 °C
Ambient Temperature	-40 to +85 °C
Body materials	SUS316 (Ni equivalent of 28.5 or higher, area reduction of 75% or higher)
Cracking pressure	Under 0.0069 MPa
Operating conditions	Flow rate Differential pressure (Reverse Pressure)
	Over 40 m³/h normal Over 10 MPa

Dimensions, Ordering No.


Nominal Diameter	Nut connection			Thread	Interfacial Distance	Cv Value MAX.	Ordering No.
	D	L1	L2				
6.35	3.9	0.7	10	7/16-20UNF	87	0.35	GUCL-750-4G-N
9.52	5.4	0.7	11	9/16-20UN	89	0.66	GUCL-750-6G-N
12.7	8	0.7	12.8	3/4-20UNEF	92.6	0.8	GUCL-750-8G-N

Filters with 50 MPa UPG® Fittings

Features

1. Compact, in-line type
2. Little pressure drop to optimal flow pass
3. Element size from 2, 5 and 10 µm

Global
Series

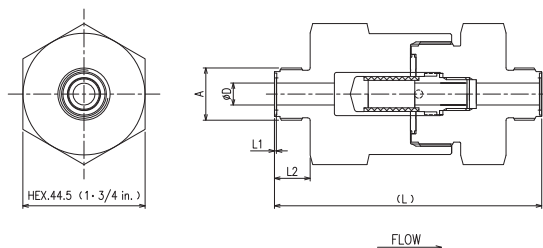

Specifications

Design Pressure	50 MPa
Fluid Temperature Range	-40 ~ +85 °C
Ambient Temperature	-40 ~ +85 °C
Body materials	SUS316 (Ni equivalent of 28.5 or higher, area reduction of 75% or higher)

Dimensions, Ordering No.

Nominal Diameter	Nut connection			Thread	Interfacial Distance	Ordering No.
	D	L1	L2			
6.35	3.9	0.7	10	7/16-20UNF	92	GUFL-750-4G-+1-N
9.52	5.4	0.7	11	9/16-20UN	94	GUFL-750-6G-+1-N
12.7	8	0.7	12.8	3/4-20UNEF	97	GUFL-750-8G-+1-N

*1: Element size number is added.
(Refer to ⑥ in "Manual Valve/Check Valve/Filter Part Number" on page 31.)



1. All wetted parts of Valves, Unions and Fittings in this catalog should be with non-corrosive gases only.
2. Please use each valve after confirming the instruction manual and daily inspection manual.

Various Change Couplers for UPG®

Specifications


Maximum operating pressure and temperature are changeable according to the materials and thickness of the tubes.
Please contact Fujikin before ordering.

Materials


SUS316
(Ni equivalent of 28.5 or higher, area reduction of 75% or higher)

95 MPa Type UPG® × Coned-and-Threaded Connection (HP) Male Type


■ UPG-H-6GX4H-95M-N




■ UPG-H-6GX6H-95M-N

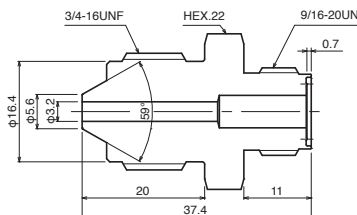

■ UPG-H-6GX9H-95M-N

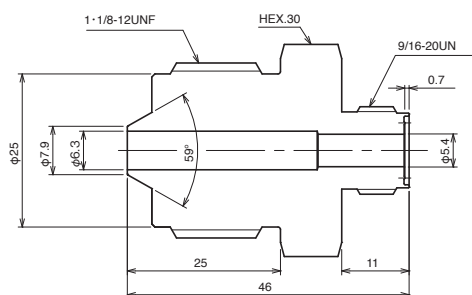


■ UPG-H-8GX9H-95M-N

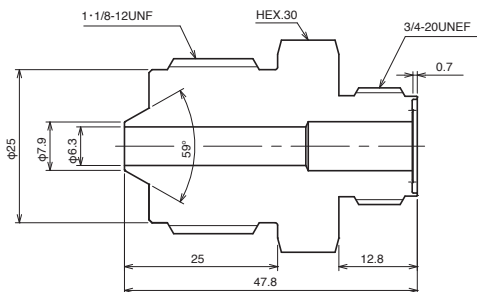


50 MPa Type UPG® × Coned-and-Threaded Connection (HP) Male Type


■ UPG-H-6GX4H-50M-N




■ UPG-H-6GX6H-50M-N

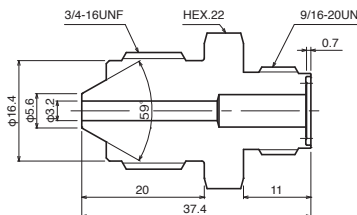

■ UPG-H-6GX9H-50M-N

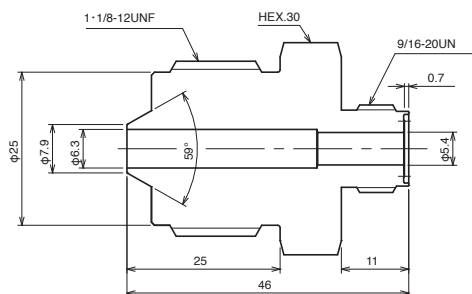

■ UPG-H-8GX9H-50M-N

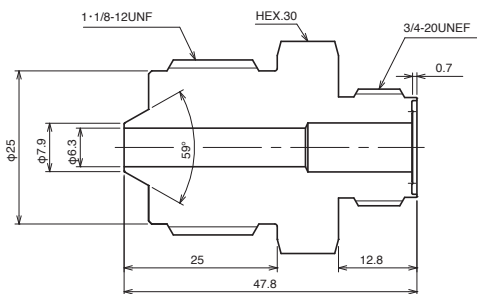

Note: Please consult Fujikin about different connections.




Weld Fittings

95 MPa Weld Fittings

Specifications and Materials

Design Pressure	95 MPa
Fluid Temperature Range	-40 ~ +50°C
Body materials	HRX19®


Weld Fittings-Elbows

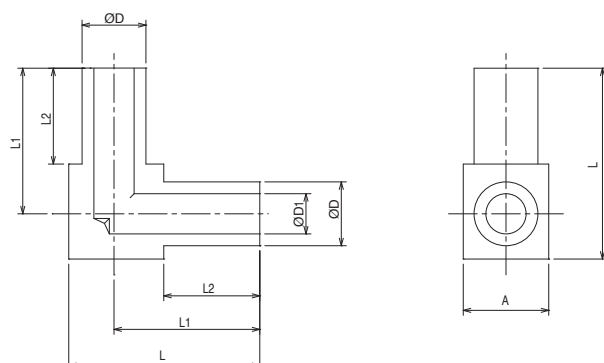

Dimensions, Ordering No.

Nominal Diameter (D)	D1	L	L1	L2	A	Ordering No.
6.35	3.5	35	30	25	11	UJL-6.35-95M-HRX19-S
9.52	5.12	45	35	25	17	UJL-9.52-95M-HRX19-S
12.7	7.3	45	35	25	17	UJL-12.7-95M-HRX19-S

Weld Fittings-Tees

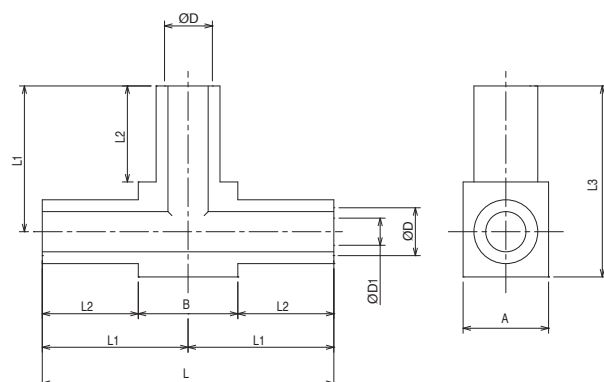

Dimensions, Ordering No.

Nominal Diameter (D)	D1	L	L1	L2	L3	A	B	Ordering No.
6.35	3.5	60	30	25	35	11	10	UJT-6.35-95M-HRX19-S
9.52	5.12	70	35	25	45	17	20	UJT-9.52-95M-HRX19-S
12.7	7.3	70	35	25	45	17	20	UJT-12.7-95M-HRX19-S

Note: Please consult Fujikin about different connections.

HRX 19® is a registered trademark of NIPPON STEEL CORPORATION.




1. All wetted parts of Valves, Unions and Fittings in this catalog should be with non-corrosive gases only.
2. Please use each valve after confirming the instruction manual and daily inspection manual.

50 MPa Weld Fittings

Specifications and Materials

Design Pressure	50 MPa
Fluid Temperature Range	-40 ~ +85°C
Body materials	SUS316 (Ni equivalent of 28.5 or higher, area reduction of 75% or higher)


Weld Fittings-Elbows

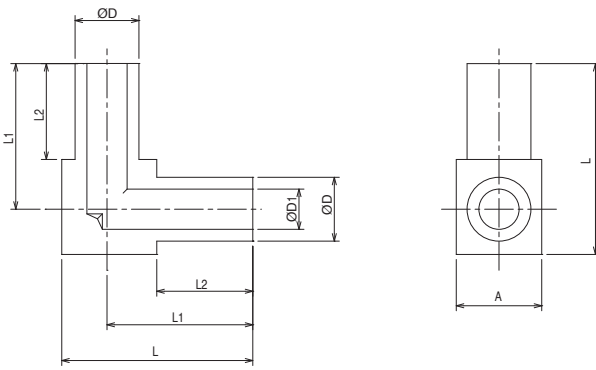

Dimensions, Ordering No.

Nominal Diameter (D)	D1	L	L1	L2	A	Ordering No.
6.35	3.9	31	25	19.1	11	UJL-6.35-50M-N28.5
9.52	5.4	38	29	19.1	17	UJL-9.52-50M-N28.5
9.52	5.4	45	35	25	17	UJL-9.52-L25-50M-N28.5
12.7	8	38	29	19.1	17	UJL-12.7-50M-N28.5
12.7	8	45	35	25	17	UJL-12.7-L25-50M-N28.5

Weld Fittings-Tees

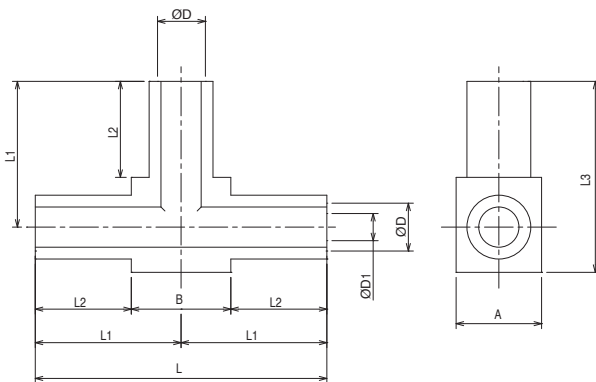

Dimensions, Ordering No.

Nominal Diameter (D)	D1	L	L1	L2	L3	A	B	Ordering No.
6.35	3.9	50	25	19.1	31	11	11.8	UJT-6.35-50M-N28.5
9.52	5.4	58	29	19.1	38	17	19.8	UJT-9.52-50M-N28.5
9.52	5.4	70	35	25	45	17	20	UJT-9.52-L25-50M-N28.5
12.7	8	58	29	19.1	38	17	19.8	UJT-12.7-50M-N28.5
12.7	8	70	35	25	45	17	20	UJT-12.7-L25-50M-N28.5

Note: Please consult Fujikin about different connections.



1. All wetted parts of Valves, Unions and Fittings in this catalog should be with non-corrosive gases only.
2. Please use each valve after confirming the instruction manual and daily inspection manual.

Model Number System

Flow Control Valve Model Number

E34 GM3 R4 – 7100 – 9 M – E 09 R10 – WN – AS – 1

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬

① Positioner specification

E34	Intrinsically safety explosion-proof construction (Exia II CT6)
E53	Pressure-resistant explosion-proof construction

② Type

GM3	Flow control valve
GM4	Flow control valve (High Flow Type)

③ Operating type

D4	Normally open
R4	Normally closed

④ Design pressure

7100	100 MPa
795	95 MPa (95 MPa UPG® connection only)
750	50 MPa (50 MPa UPG® connection only)

⑤ Hood

None	Standard
M	For precool low temperature only (7100 only)

⑥ Nominal diameter

4	6.35mm
6	9.52mm
8	12.7mm
9	14.2mm
12	19.05mm
16	25.4mm

⑦ Connection specification

M	Coned-and-Threaded MP type
H	Coned-and-Threaded HP type
G	UPG® Fitting type

⑧ Valve characteristic

L	Linear
E	EQ%

⑨ Rated Cv value

⑩ Rangeability

Select the numbers corresponding to the suitable Cv value and rangeability by referring to the table, "Combination of Cv Value and Rangeability", below.

⑪ WN

WN	Gen.2 type seat: Fujikin Standard * Durability has been improved.
MF	Middle flow type (Cv value of 0.5 supported) Indicated in the model number when Cv value number 07 or 08 is selected.

⑫ Accessories

AS	Regulator
V	Solenoid valve
KC	Proximity sensor

⑬ Actuator installation posture

1	Installation posture no. 1
2	Installation posture no. 2
3	Installation posture no. 3
4	Installation posture no. 4

* Regarding the installation posture number, refer to the product drawing.

Combination of Cv Value and Rangeability

Cv value no.	Range ability	EQ%, linear									
		R2 20:1	R3 30:1	R4 40:1	R5 50:1	R6 60:1	R7 70:1	R8 80:1	R9 90:1	R10 100:1	
03	2										
04	1.5										
07	0.5										
08	0.35										
09	0.25										
10	0.15										
11	0.1										
12	0.07										
13	0.05										
14	0.035										
15	0.025										
16	0.015										
17	0.01										

We can manufacture inner valves for the combinations indicated in [BLUE].

Shut-off Valve Model Number

APR – GUH – 7100 – 9 M – KC – 1

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Operating type

AP	Pneumatically operated, normally open
APR	Pneumatically operated, normally closed

② Type

GUH	Shut-off Valve (Global Series)
-----	--------------------------------

③ Design pressure

7100	100 MPa
795	95 MPa (95 MPa UPG [®] connection only)
750	50 MPa UPG [®] only

④ Hood

None	Standard
M	For precool low temperature only (7100 only)

⑤ Nominal diameter

4	6.35mm
6	9.52mm
8	12.7mm
9	14.2mm
12	19.05mm
16	25.4mm

⑥ Connection specification

M	Coned-and-Threaded MP type
H	Coned-and-Threaded HP type
G	UPG [®] Fitting type

⑦ Accessories

AS	Regulator
V	Solenoid valve
KC	Proximity sensor

⑧ Actuator installation posture

1	Installation posture no. 1
2	Installation posture no. 2
3	Installation posture no. 3
4	Installation posture no. 4

* Regarding the installation posture number, refer to the product drawing.

Manual Valve / Check Valve / Filter Model Number

GUH – 7100 L – 9 M – 2

① ② ③ ④ ⑤ ⑥

① Type

GUH	Manual Valve (Global Series)
GUCL	Check Valve (Global Series)
GUFL	Filter (Global Series)

② Design pressure

7100	100 MPa
795	95 MPa (95 MPa UPG [®] connection only)
750	50 MPa (50 MPa UPG [®] only)

③ Accessories (manual valve only)

L	Lock nut provided
---	-------------------

④ Nominal diameter

4	6.35mm
6	9.52mm
8	12.7mm
9	14.2mm
12	19.05mm
16	25.4mm

⑤ Connection specification

M	Coned-and-Threaded MP type
H	Coned-and-Threaded HP type
G	UPG [®] Fitting Type

⑥ Element size (filter only)

2	2μm
5	5μm
10	10μm

Coned-and-Threaded Connection Model Number

GUJU - L - 9 M - N

① ② ③ ④ ⑤

① Type

GUJU	Coned-and-Threaded
------	--------------------

② Fitting shape

F	Straight union
L	Elbow union
T	T union
X	Cross union

③ Nominal diameter

4	6.35mm
6	9.52mm
9	14.2mm
12	19.05mm
16	25.4mm

④ Connection specification

M	MP: Middle pressure
H	HP: High pressure

⑤ Unit body material

N	SUS316 (Ni equivalent of 28.5 or higher, area reduction of 75% or higher)
---	---

Collar-and-Gland Model Number

GUJU - 9 M CN

① ② ③ ④

① Type

GUJU	Coned-and-Threaded
------	--------------------

② Nominal diameter

4	6.35mm
6	9.52mm
9	14.2mm
12	19.05mm
16	25.4mm

③ Connection specification

M	MP: Middle pressure
H	HP: High pressure

④ Collar-and-Gland

CN	Collar-and-Gland
----	------------------

UPG® Fitting Part Number

UPG - 9.52 S - 95M - L23 - N28.5 -

① ② ③ ④ ⑤ ⑥ ⑦

① Type

UPG	UPG® Fitting
-----	--------------

② Nominal diameter

6.35	6.35mm
9.52	9.52mm
12.7	12.7mm

③ Part types

N	Nut
S	Sleeve
G	Gasket
C	Coupling

④ Design pressure

None or 50M	50 MPa
95M	95 MPa

⑤ Length (sleeve only)

◆For 50 MPa type

L23	23mm
L31	31mm
L33	33mm
L38	38mm *1
L44	44mm *1

◆For 95 MPa type

L50	50mm
-----	------

⑥ Material (sleeve only)

N28.5	SUS316 (Ni equivalent of 28.5 or higher, area reduction of 75% or higher)
HRX19	HRX19® *2

⑦ Other

L	long nut (95 MPa type nut only) *1
---	------------------------------------

*1. Select when using a coupling

*2. Material of sleeve is HRX19® in the case of 95 MPa

PROVIDER POWER UNIT

WHAT is PROVIDER?

0.7MPa Operating Air pressure which is available in any plant move the PISTON.



Discharge high pressure continuously
150MPa (N2 GAS)
500MPa (Liquid)
3 series(Model:JHP, MG, ML)

JHP series: Small body, compact (for Intermittent drive)

MG, ML series: for continuous drive

Specifications

Max. Discharge Pressure(MPa)	Operating Temperature(°C)
500 (Liquid) 150 (N2 Gas) Please contact us if you need other type of gases.	5 - 40

*: Even more hotness is sometimes practicable by the gas kind, so please consult Fujikin

Features

- **Pressure Set:**
Once you set operation pressure between 0.1 - 0.7 MPa, automatically max. pressure is available.
- **Explosion Proof:**
as only air is use.
- **Wetted parts:**
Suitable material & oil free type is available.
- **Double action cylinder: discharge big volume outlet.**
- **Stable Action:**
Balancing of Inlet & outlet pressure keeps set pressure. No trouble against over load
- **Low Noise Drive:**
This system uses only air and use no motor. Silencer reduce the air vent noise.
- **Low Price:**
because of no motor like compressor type.



Please use in the room of temperature 5 - 40°C.

Products Line Up

PROVIDER series kept responding to the customer's needs, and the rich product line-up is made even.

JHP Series: Small, Compact, for intermittent drive.

MG, ML Series: For continuous drive, (Oil free, for liquid, etc.)




for Gas



for Liquid




MG Series for GAS



ML Series
for Liquid/ Double action type

POWER UNIT

Equipped with all functions necessary to operating PROVIDER.

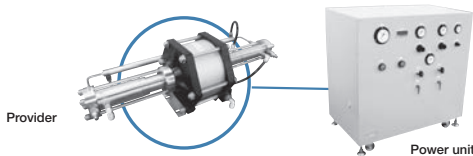

Power unit includes all necessary equipments to produce high pressure like:
Provider, Air-regulator, Air-filter, Pressure gauge, Exhaust & Inlet pressure control valves, strainer.

Compact ! Light Weight! Transportable !

APPLICATION

Typical Use Example

PROVIDER is using widely by the high performance beyond the expectation.

- **Test under high pressure safety regulation for tank, pressure resistant, air tightness, destructive test.**
- **For test of plant piping, instrumentation line pressure resistant, air tightness.**
- **As test equipment for plant pressure gauge, bourdon gauge.**
- **For molding bellows, valve.**
- **For oil pressure equipment.**
- **For high pressure boost.**

Fluid

Gases :

Air, N2, He, H2, O2, others

Liquids :


Water, Oil, Organic Solvent, (MNP, Methanol), etc.

When it's for gases besides Air and N₂, it'll be the different specification, so please consult Fujikin

**To contribute to preservation of law and order,
safety and stable driving of hydrogen related equipment,
Fujikin also works on substantiality of customer service aggressively.**


Engineering services, equipment / piping design and production

Fujikin can provide customer support in all aspects from design to production, launching, modification and maintenance, utilizing No.1 capability and experience of flow control technology and high pressure gas certification.

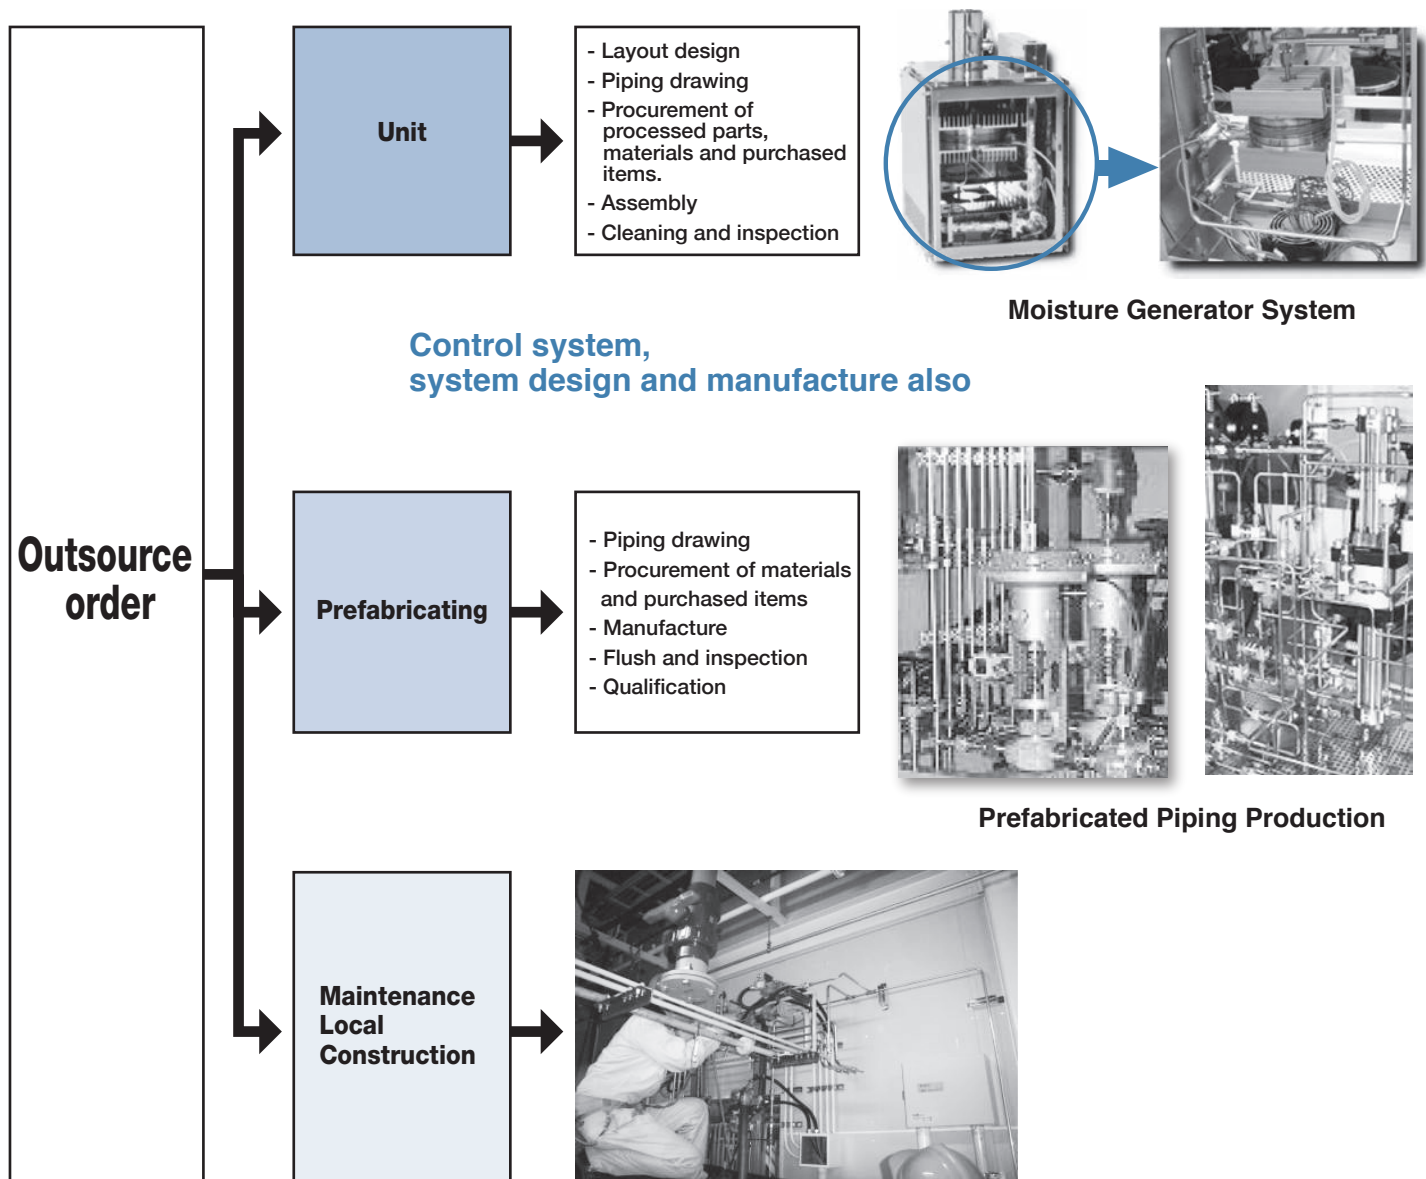

**If you have trouble with unit or piping,
please contact Fujikin local office by all means !**

Valve Unit Featuring UPG® Fittings for Hydrogen Station's Accumulator

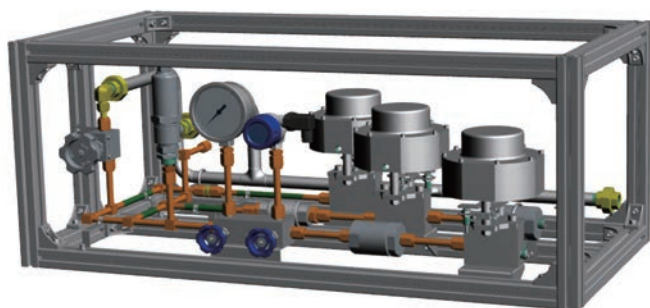

Feature 1 Use of UPG® joints provides the following benefits.

1. Excellent airtightness

- ◆Original seal structure realizes excellent airtightness.
- ◆Metal gaskets minimize loads on pressure-resistant parts even if attached and detached repeatedly.

2. Easy installation and operation

- ◆Space for the removal of equipment in axial direction is not necessary for assembly or disassembly.
- ◆Installation is as easy as managing rotation. Overtightening prevention mechanism is built in.
- ◆Installation requires less tightening torque than when coned-and-threaded connection is used.

3. Excellent extendibility


- ◆Seal sections are separated from sections subject to external force to realize superb vibration resistance.




Weld Fitting



Manifold valve





Accumulator unit (example)



Conventionally required piping space can be reduced. (example)
(70% reduction or more in volume)

Feature 2

Use of welded joints and manifold valves has reduced the number of connections and the overall unit size.



Accumulator unit (example)

Feature 3

Prefabricated structures enable the construction of the unit in a factory without considering the number of accumulators (number of banks).

Rich manufacturing experience and cutting edge technology

Fujikin can respond to customers' request in various system including Integrated Gas System, Moisture Generator System, static mixer-dispensing unit, prefabricated piping and etc., utilizing our extensive manufacturing experiences and flow control technology in each industry that we've cultivated so far.

**Please be free to contact Fujikin for production
or sales of systems utilizing some elements based on customer's technology.**

Integrated Solutions

We can propose packaged products of instrumentation piping for **Hydrogen** station and etc..

Fujikin and NAGANO KEIKI co.,LTD. joint proposal.

Advantage

Compactness

Reduced number of parts

Connect Point reduction




Reduced number of works

Fujikin contributes to **security and safety and security** of the instruments.

Piping example ①

Packaging before

After

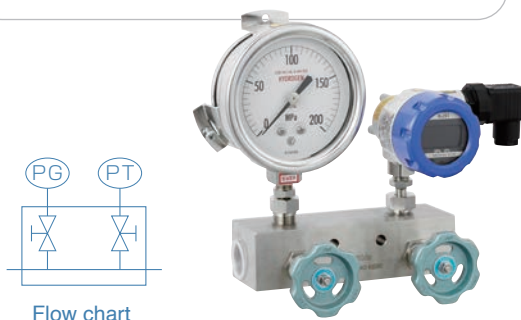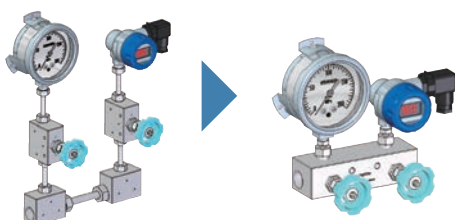


- Manual valve: **2 sets** → **Manifold type**
- Hi-press. fitting: **2 pcs** → **0 pcs**
- Hi-press. piping: **5 pcs** → **2 pcs adapter**
- Connection part: **10** → **4**
- Fitting construction part: **10** → **4**
- Tightness test: **10** → **4**

Reduced

Piping example ②

Packaging before

After

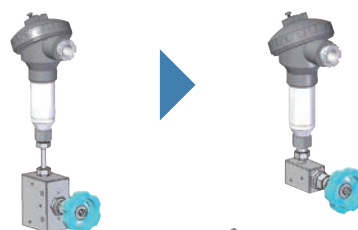

- Hi-press. piping: **1** → **0**
- Fitting construction: **2** → **1**
- Tightness test: **2** → **1**

Reduced

Cv Value Calculation

Please confirm the necessary Cv Value suited to the intended use (process valves, meter master valves, etc.) before selecting an appropriate valves. Also, if there is a large difference between the flow channel diameter and piping diameter, please multiply the Cv value for the valve unit by revising coefficient Fp to determine the revised Cv Value (CvR).

What is Cv Value?

Cv Value is a capacity coefficient for valves and other devices. It is defined in the Japanese Industrial Standards (JIS) as "the flow volume expressed in US gal/min of clear water at 60°F (15°C) through a valve within a particular operating range with a pressure differential of 1 lb/inch² (= 1 psi)."

■ Cv Value Calculation

Fluid		Differential Pressure Conditions	$P_2 > \frac{P_1}{2}$	$P_2 \leq \frac{P_1}{2}$	Explanation of Symbols
Liquid	General		$Cv = 0.366 Q_L \sqrt{\frac{G_L}{P_1 - P_2}}$	Same as left	Q_L [m ³ /h]: Liquid flow volume Q_G [m ³ /h(normal)]: Gas flow volume in normal state (15°C, 0.1013 MPa abs) Q_S [kg/h]: Steam flow volume P_1 [MPa abs]: Primary side absolute pressure ★2 P_2 [MPa abs]: Secondary side absolute pressure ★2 K_V : Viscosity correction factor ★1 t [°C]: Fluid temperature G_L : Fluid specific gravity (water = 1) G_G : Gas specific gravity (air = 1) S [°C]: Steam superheated temp. X : Dry steam temp. (dry saturated vapor $X = 1$)
	High Viscosity ★1		$Cv = 0.366 Q_L K_V \sqrt{\frac{G_L}{P_1 - P_2}}$	Same as left	
Gas			$Cv = \frac{Q_G}{4140} \sqrt{\frac{G_G (273+t)}{(P_1 - P_2) P_2}}$	$Cv = \frac{Q_G}{2070 P_1} \sqrt{G_G (273+t)}$	
Steam	Saturated Water Vapor		$Cv = \frac{Q_S}{197.8 \sqrt{(P_1 - P_2) P_2}}$	$Cv = \frac{Q_S}{98.91 P_1}$	
	Heated Water Vapor		$Cv = \frac{Q_S}{197.8 \sqrt{(P_1 - P_2) P_2}} (1 + 0.0013S)$	$Cv = \frac{Q_S}{98.91 P_1} (1 + 0.0013S)$	
	Wet Steam		$Cv = \frac{Q_S X}{197.8 \sqrt{(P_1 - P_2) P_2}}$	$Cv = \frac{Q_S X}{98.91 P_1}$	

★1: For liquids, if kinematic viscosity is 20 mPa·s or more and calculated Cv value is 0.01 or less, viscosity correction calculation is required. Please contact Fujikin if fluid specifications are needed for viscosity correction.

★2: Please use pressure in the immediate proximity of the valve. Calculations using pressure from a point distant from the valve can produce significant errors due to the effects of piping pressure loss, etc.

Important Note



Cv Value calculation provides the standard used in valve selection; so, please use as a reference value. It is possible that fixed piping conditions, usage conditions or other factors can cause actual values to differ from calculated values.

About Selection of Cv Value for Flow Control Valves

1 Selection of Characteristics

Select please Linear or EQ% or ON=OFF

◆ Linear (Straight line form flow characteristic)


The characteristic that a flow rate (Cv Value) is proportional to a valve lift. A linear flow characteristic is known even if it sees the graph, but if the valve stroke increases 10%, Cv Value will also increase 10%. It is suitable for temperature control, open loop control, etc.

◆ EQ% (Equal ratio form flow characteristic)

The rate of change of the flow to change of a unit stroke leads all the strokes, and it is the fixed characteristic. For example, if range ability is 20:1, whenever the stroke of a valve increases 10%, a Cv Value will increase about 48% respectively, when every about 35% Range – ability is 50:1. It is suitable for pressure control, closed loop control, etc.

◆ ON – OFF

It is also called the quick open characteristic. Valve is the characteristic that it is begun from the start of a difference to pass a large flow, and the rating Cv Value can be secured by about 50 % of valve travel.

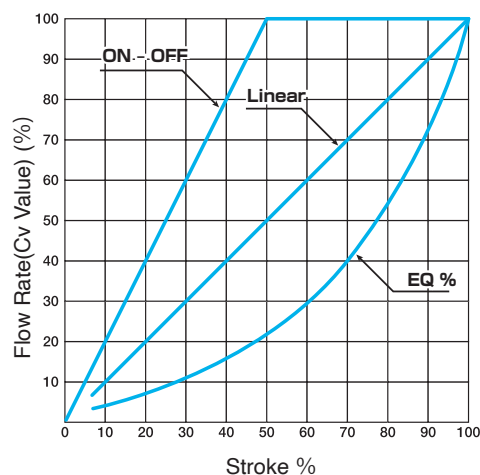

2 Determination of Rated Cv Value


The Rated Cv Value in consideration of a safety factor is selected from calculated maximum Cv Value. The maximum calculated Cv Value is multiplied by the safety ratio according to a valve characteristic.

- ① ON = OFF 2
- ② EQ % 1.5
- ③ Linear 1.2

(The maximum calculation Cv Value) x (safety factor) < (Rated Cv Value) – becoming Cv Value is selected. (Please refer to the right table for the Cv Value currently manufactured)

3 Selection of Range – ability

(Rated Cv Value) / (minimum calculated Cv Value) becomes necessary Range – ability in control. In the domain of not less than 10% of valve travel, it selects so that the minimum calculation Cv Value can be controlled. (Refer to the right table for the value of the Range – ability currently manufactured)

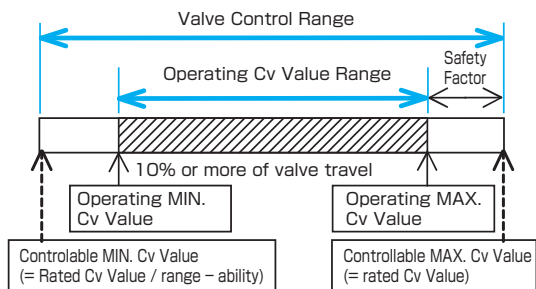

WARNING Flow control valves has the tolerance according to the plan Cv Value in each valve travel. When you determine Rated Cv Value, please select suitable margin.

