




Features

- 1. Compact Design
- 2. Open and Close quickly
- 3. Panel Mounting
- 4. End Connections **New V-Lok** Tube Fittings

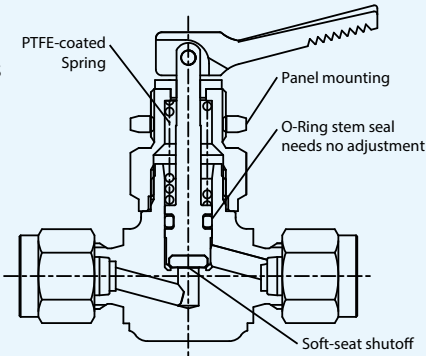

Technical Data


Temperature and Pressure Rating

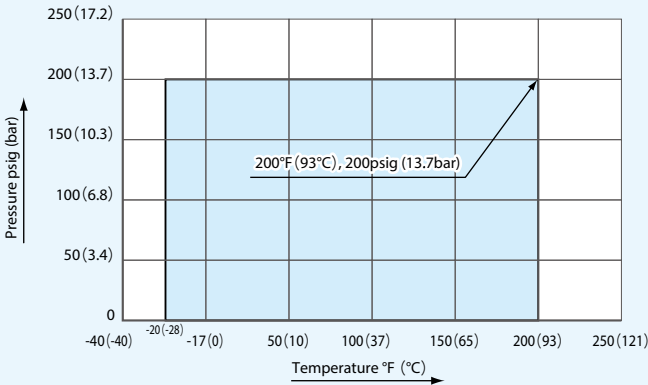

Applicable Fluid

Air, Nitrogen gas, Inert gas like Helium, and non - corrosive gas and liquid.

Materials of Construction


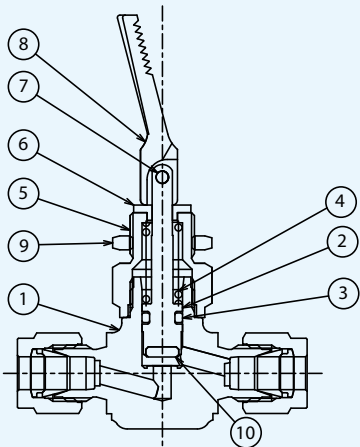


No.	Description	Material
1	BODY	※ ASTM A182 316
2	STEM	※ ASTM A276 316
3	O-RING	※ FKM
4	SPRING	SUS631J1
5	PACKING NUT	ASTM A276 316
6	WASHER	NYLON
7	ROLL PIN	SUS304
8	HANDLE	NYLON
9	PANEL NUT	ASTM A276 304 or ASTM A276 316
10	STEM TIP	※ PTFE
Lubricants		Fluorinated-based

※ : Wetted Parts


Dimensions

Globe Type

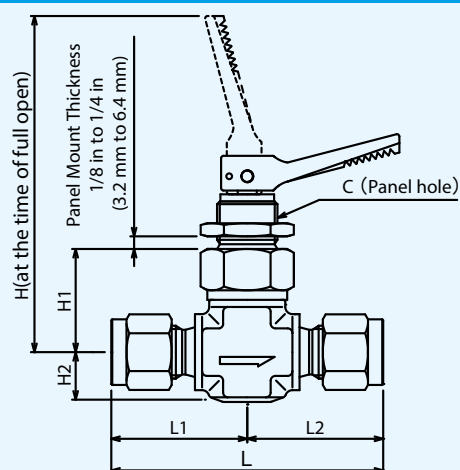

Connection Types	Nominal Sizes	Operating Pressure psi (bar)	Orifice inch (mm)	Dimensions inch (mm)						Ordering Numbers
				L	L1	L2	H	H1	H2	
New V-Lok	1/4in. (6.35mm)	200 (13.8)	0.13 (3.2)	2.26 (57.4)	1.13 (28.7)	2.81 (71.4)	0.86 (21.8)	0.37 (9.5)	0.53 (13.5)	VUK-91P-6.35-V
	3/8in. (9.52mm)		0.25 (6.4)	2.58 (65.5)	1.29 (32.8)	3.56 (90.4)	1.06 (26.9)	0.5 (12.7)	0.66 (16.8)	VUK-91P-9.52-V
				2.8 (71.1)	1.4 (35.6)					VUK-91P-12.7-V
	6mm		0.13 (3.2)	2.26 (57.4)	1.13 (28.7)	2.81 (71.4)	0.86 (21.8)	0.37 (9.5)	0.53 (13.5)	VUK-91P-6-V
				2.22 (56.4)	1.11 (28.2)					VUK-91P-8-V
	10mm		0.25 (6.4)	2.72 (69.1)	1.36 (34.5)	3.56 (90.4)	1.06 (26.9)	0.5 (12.7)	0.66 (16.8)	VUK-91P-10-V

Ordering Information



- | | | |
|------------------------------------|---|--|
| ① Valve Series | ④ End Connections
9 : New -Lok Type (Globe Type) | ⑦ Connection Sizes
6 : New -Lok 6mm
8 : New -Lok 8mm
10 : New -Lok 10mm
6.35 : New -Lok 1/4in.
9.52 : New -Lok 3/8in.
12.7 : New -Lok 1/2in. |
| ② Body Material
Stainless Steel | ⑤ Working Pressure
200psig (1.37 bar) | ⑧ New -Lok Type |
| ③ Valve Type
Toggle Valves | ⑥ Panel Nut | |